


Float selection diagram VLI Type 34000/34110, Smart Line 50

These data apply for an operating temperature of m20°C.

For higher operating temperatures, please check the max. permissible float pressure on the respective data sheet.

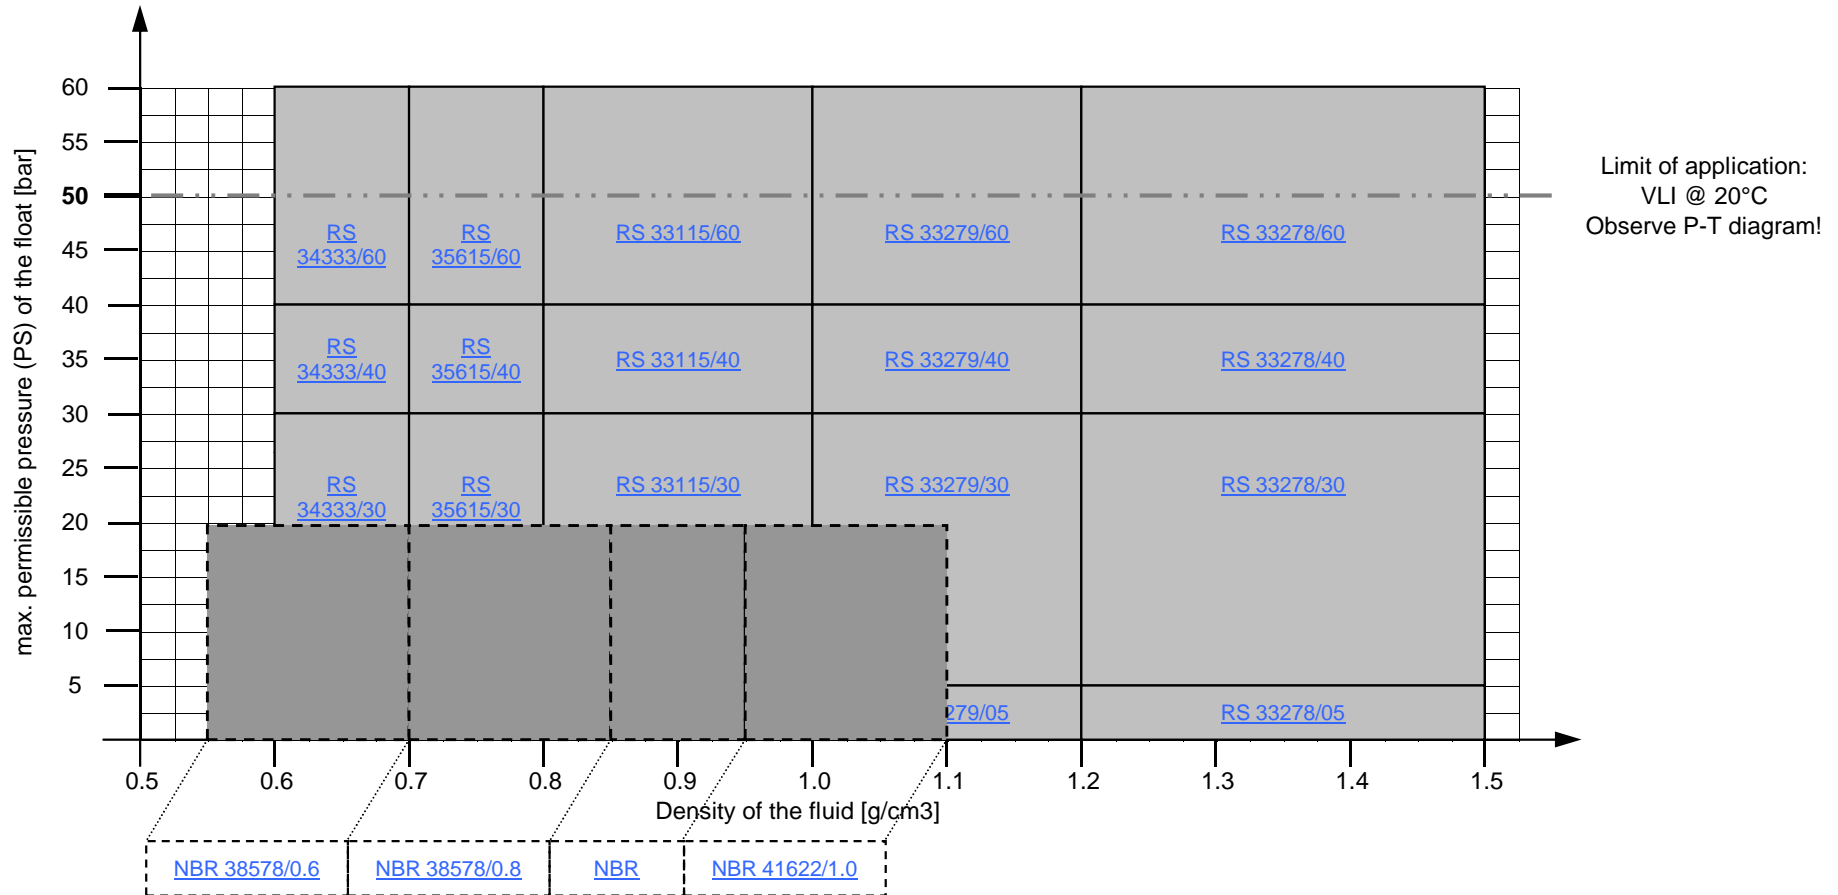

Comments:

NBR = foamed plastic float

example: 38578/X.X = Density range of the floats in g/cm³

Material = NBR

Attention! Check media compatibility

RS = cylindrical float

example: 31115/XX = max. permissible pressure in bar @ 20°C

Material = 316L

Interior diameter of the float chamber = 29.7mm

Additional charge for densities < 0.8g/cm³ and > 1.50g/cm³ due to extended length of bottom float run-out