


Pressure-temperature-rating for VLI Smart Line 50, type 34000 & 34110

Max. 50bar(g) @ 20°C, up to max. 250°C for VLI bypass float chamber in SS EN 1.4401, 1.4436 / 1.4404, 1.4435 resp. A NSI 316/316L

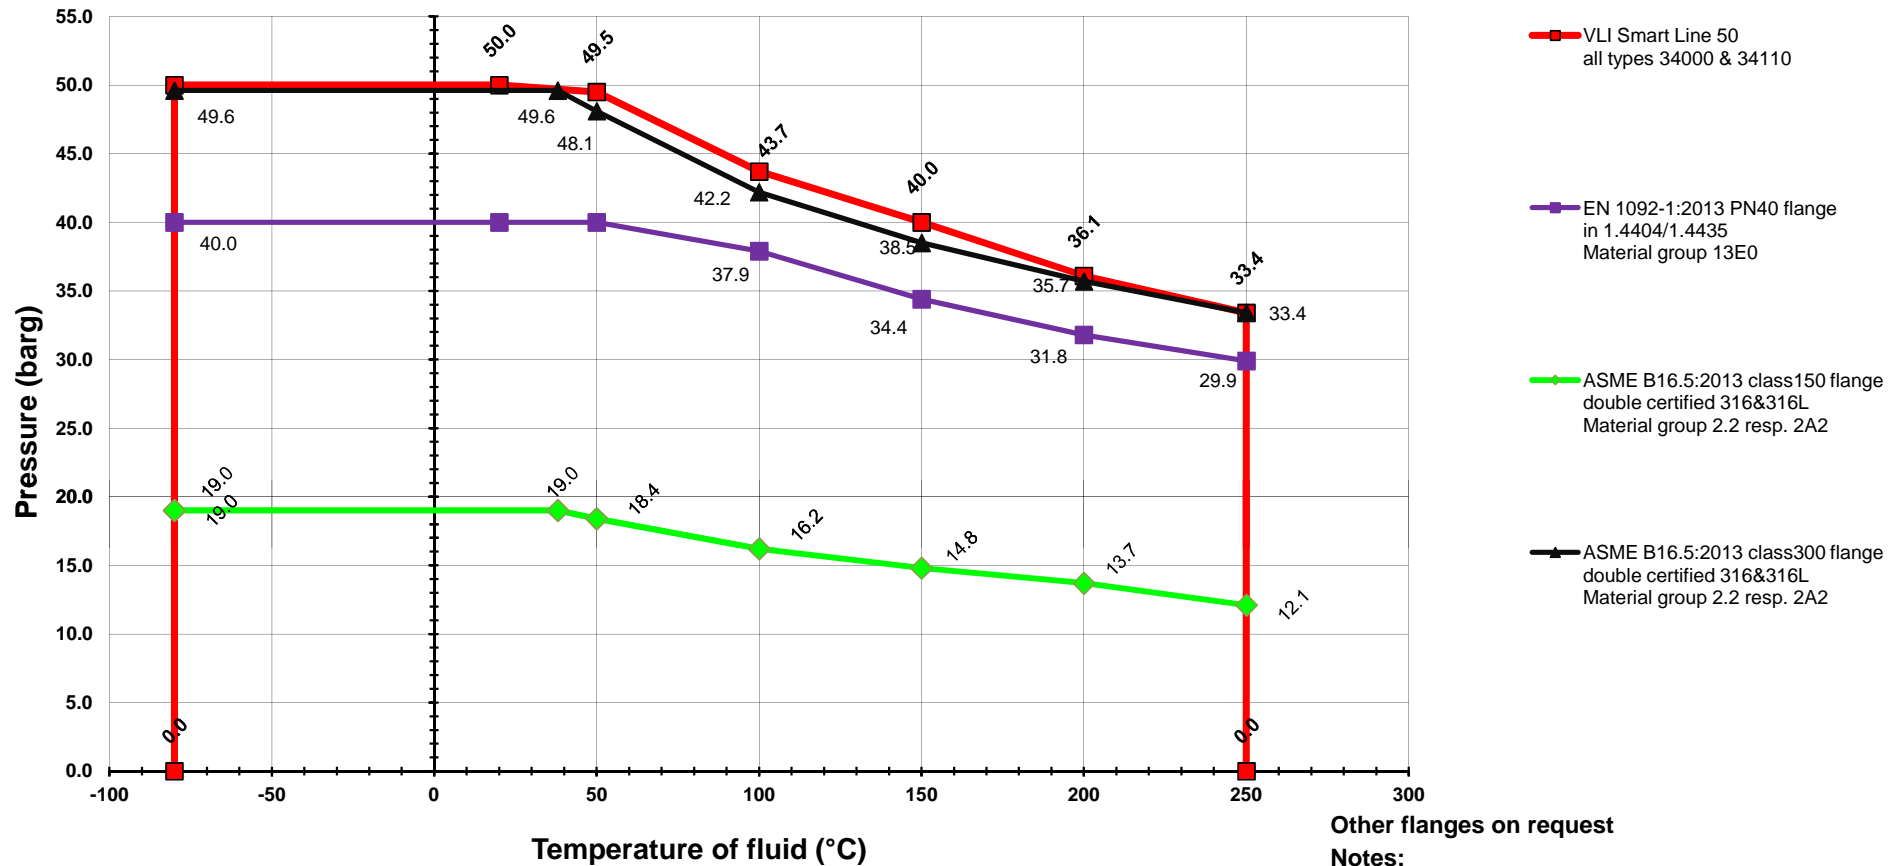

Other flanges on request

Notes:

- EN1092-1:2013 flange PN10 and PN16 up to DN150 use identical interface dimensions
- EN1092-1:2013 flange PN25 and PN40 up to DN150 use identical interface dimensions
- Tolerated max. pressure @ specified temperature of the VLI is given either by the bypass tube or by the connection flange
- Lower value sets the limitation! ---

