


Float selection diagram VLI Typ 32755, Standard Line 50

These data apply for an operating temperature of $\leq 20^\circ\text{C}$.
For higher operating temperatures, please check the max. permissible float pressure on the respective data sheet.

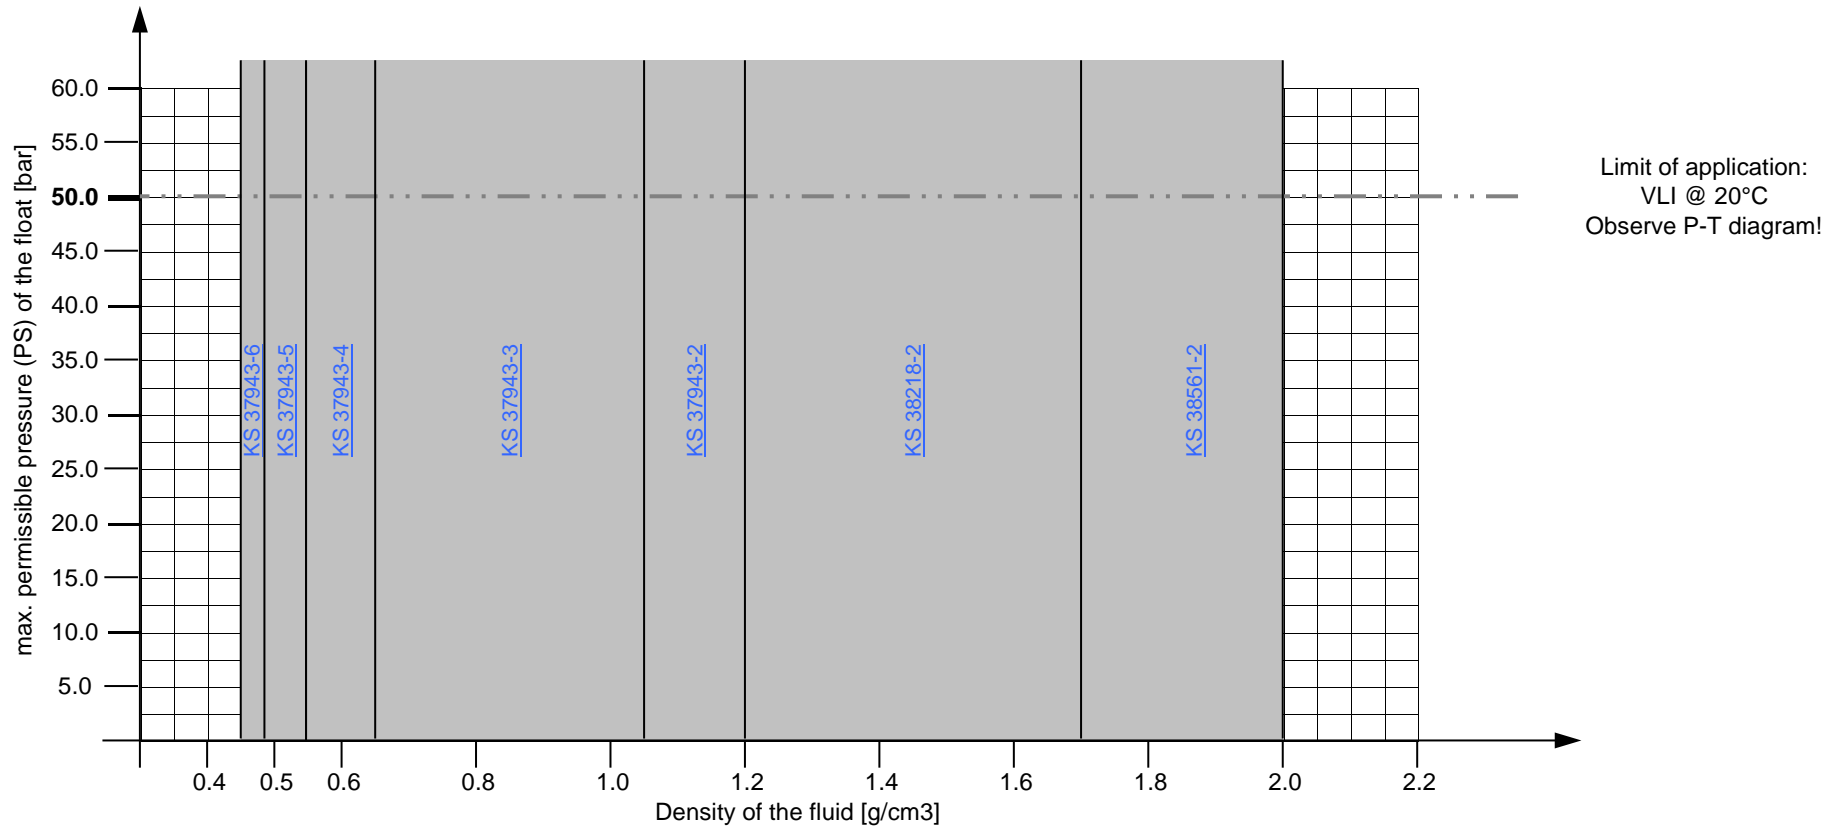

Comments:

KS = ball float Example 37943-X = number of balls Material = Titan Alloy
Interior diameter of the float chamber = 50.0mm
For steam or condensate applications, please check the use of damping springs
Additional charge for densities < 0.55g/cm³ due to extended length of bottom float run-out and ball float with more than 4 balls