


Float selection diagram VLI Typ 34300, Standard Line 28

These data apply for an operating temperature of $\leq 20^\circ\text{C}$.
For higher operating temperatures, please check the max. permissible float pressure on the respective data sheet.

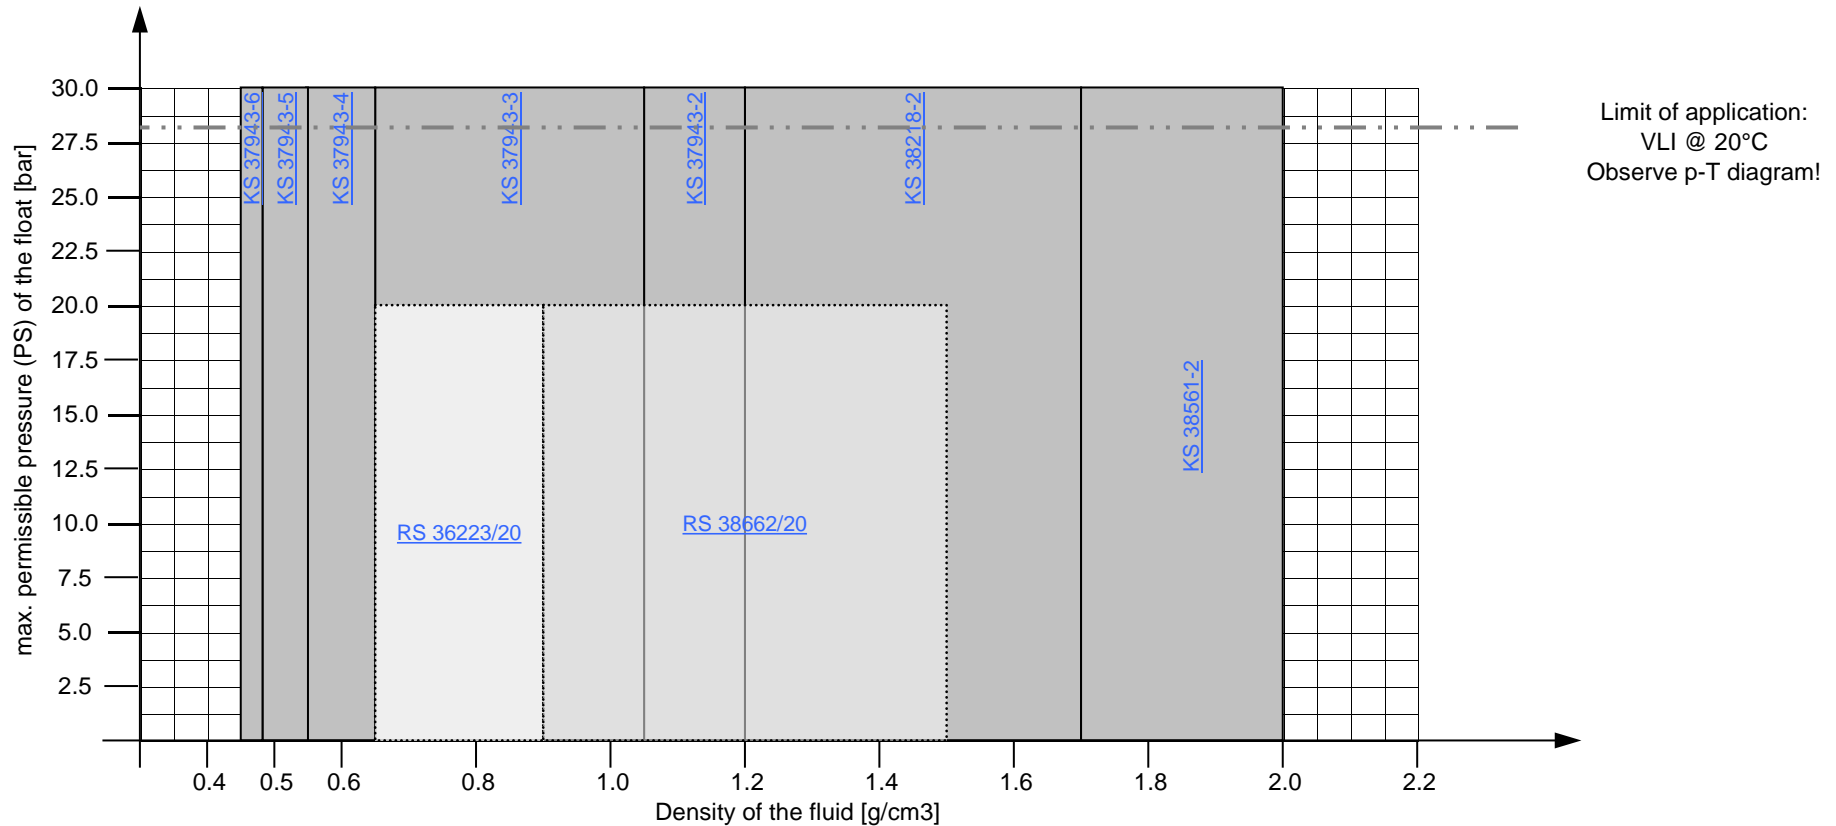

Comments:

RS = cylindrical float

KS = ball float

Interior diameter of the float chamber = 50.0mm

For steam or condensate applications, please check the use of damping springs

Additional charge for densities < 0.55g/cm³ due to extended length of bottom float run-out and ball float with more than 4 balls

Example 38662/XX = max. permissible pressure in bar @ 20°C

Example 37943-X = number of balls

Material = 316L

Material = Titan Alloy