


# Pressure-temperature-rating for VLI Standard 6, type 23614

Max. 6bar(g) @ 20°C, up to max. 150°C for VLI bypass float chamber in SS EN 1.4401, 1.4436 & 1.4404, 1.4435 resp. ANSI 316&316L

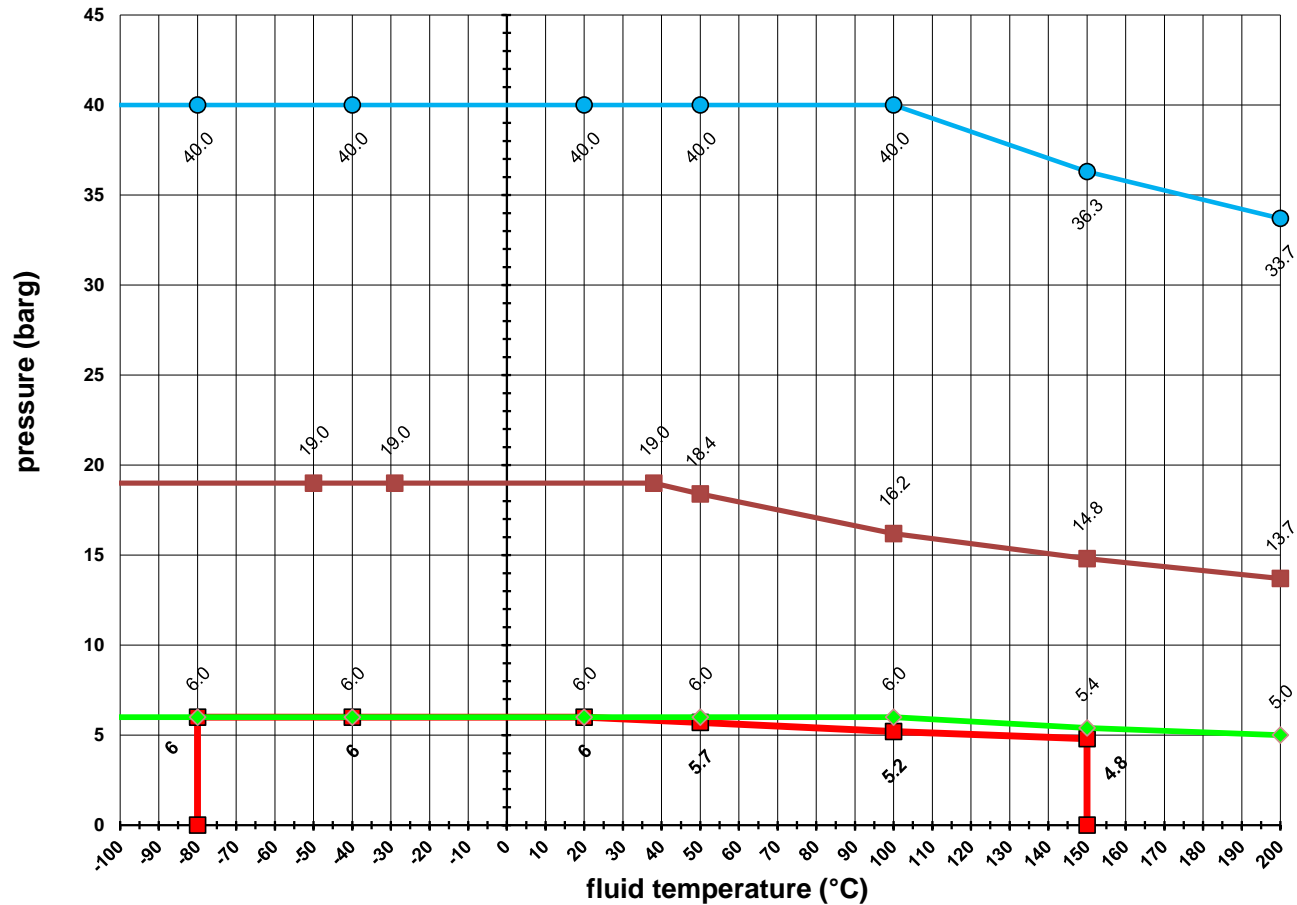

- VLI StandardLine 6  
all types 23614 (-A, -B, -K, -O)
  
- ◆ EN 1092-1 PN6 flanges  
Double certified 1.4401/1.4436 & 1.4404/1.4435  
Material group 13E0 & 14E0
  
- ANSI B16.5 class150 flanges  
ISO 7005-1 PN20  
Double certified 316&316L  
Material group 2.2 resp. 2A2
  
- EN 1092-1 PN40 flanges  
Double certified 1.4401/1.4436 & 1.4404/1.4435  
Material group 13E0 & 14E0

### Other flanges on request

#### Notes:

- EN1092-1 flanges PN25 and PN40 up to DN150 have identical interface dimensions
- Tolerated max pressure @ specified temperature of the VLI is given either by the bypass tube or by the connection flanges
- Lower value sets the limitation! ---

