


Pressure-temperature-rating for VLI Standard 50, type 32755

www.weka-ag.ch

Max. 50bar(g) @ 20°C, up to max. 500°C for VLI bypass float chamber in SS EN 1.4401, 1.4436 & 1.4404, 1.4435 resp. ANSI 316&316L

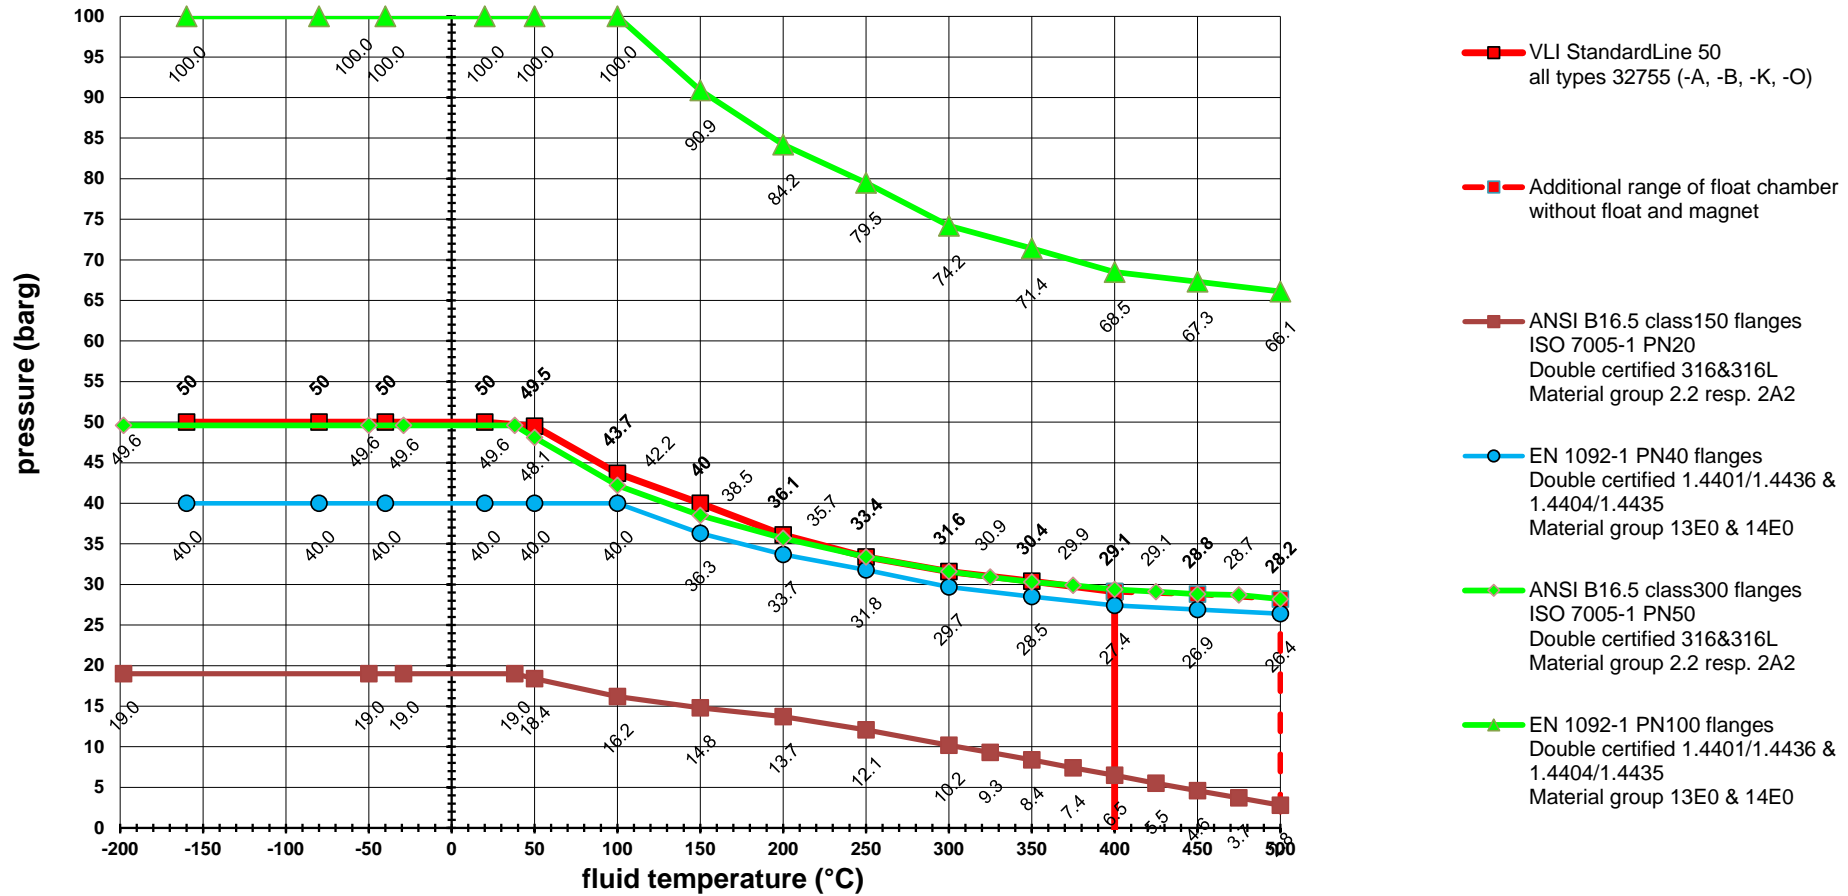

Other flanges on request

Notes:

- EN1092-1 flanges PN25 and PN40 up to DN150 have identical interface dimensions
- Tolerated max pressure @ specified temperature of the VLI is given either by the bypass tube or by the connection flanges
- Lower value sets the limitation! ---

