


High Pressure Line 100

Type: 26411-K

Design meets the requirements of PED 2014/68/EU and harmonized standards

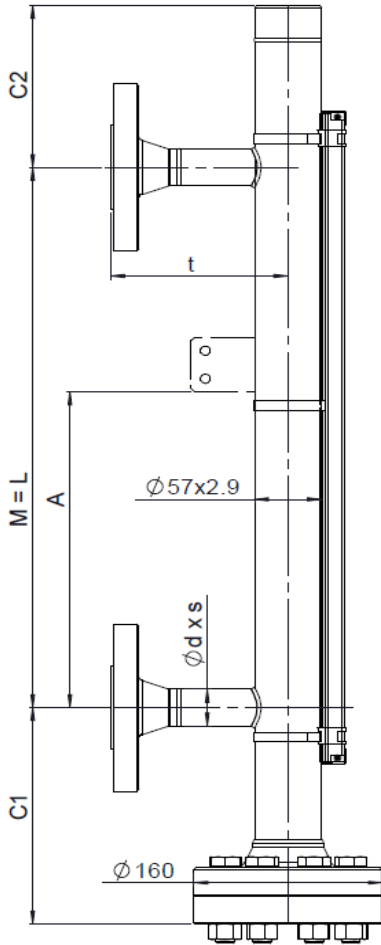

Purchase Order Data:

Company: Project:
 Purchase order no.:
 Quantity: Tag no.:

Operating Conditions

Fluid:
 Density: $\geq 0.55\text{g/cm}^3$ g/cm^3 :
 Viscosity: $\leq 600\text{cSt}$ cSt :
 Operating pressure: max. 100bar(g) @ 20°C *1) bar(g):
 Design pressure: " bar(g):
 Operating temperature: -80°C ... 400°C *1) °C:
 Design temperature: " °C:
 Connecting Distance "L": max. 5600mm (one-piece design) mm:

Design and Materials:

standard execution:
 Float chamber: 316&316L
 Float: Ti-alloy type no.:

Screws and nuts in A2-70 (AISI 304) for operating temp. -80°C ... +400°C

Damping spring, 1.4401 No.: 27399 top bottom
 Gaskets: Graphite incl. reinforcing net in ss 316/316L ($\leq 400^\circ\text{C}$) Standard
 Spiral wound gasket Graphit & 316 ($\leq 400^\circ\text{C}$)

Process Connections

EN-Connecting Flanges acc. EN1092-1 (Standard): DN15:
 - EN1092-1/11 B1/DNxx/PN100/316L DN20:
 - wn-flange, RF, Rz=12,5 ... 50µm, turned DN25:

ANSI/class600 (= ISO/PN100) - Connecting Flanges: ANSI 1/2" resp. ISO DN15 :
 - ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 11/B1 ANSI 3/4" resp. ISO DN20 :
 - wn-flange, RF SF, Rz=12,5 ... 50µm, turned ANSI 1" resp. ISO DN25 :

Other Connections

Float extension lower / upper:

	C1:	C2:
Standard	200	150

C1 & C2 shorter or longer if out of standard range or with damping springs

Standard Flange Connections:

	DIN/EN	ANSI/ISO
Connection pieces, d*s:		
DN15:	21.3*2.6	21.34*2.77
DN20:	26.9*2.6	26.67*2.87
DN25:	33.7*3.2	33.40*3.38
>= DN32 *2):	33.7*3.2	33.40*3.38
Dimension t / Dimension tt (w/o Flange):		
DN15:	150 / 105	150 / 91.3
DN20:	150 / 102	150 / 86
DN25:	150 / 93	150 / 81.6
>= DN32 *2):		tba *3)

Indication Rail

PC, IP65 (<150°C)	Flaps: red-silver	No.: 34837	Standard <input type="checkbox"/>
PC, IP68, inert gas (<150°C)	Flaps: red-silver	No.: 41008	<input type="checkbox"/>
Al/PC, IP54 (<250°C)	Flaps: red-silver	No.: 34560	<input type="checkbox"/>
Al/Glass, IP54 (<400°C)	Flaps: black-silver	No.: 37100	<input type="checkbox"/>
316L, IP67 (<250°C)	Flaps: red-silver	No.: 42403	<input type="checkbox"/>
316L, IP67 (<400°C)	Flaps: black-silver	No.: 42404	<input type="checkbox"/>
Special execution	Flaps: <input type="text"/>	No.: <input type="text"/>	<input type="checkbox"/>

Accessories (refer to installation instructions 20010501)

Fixation bracket No. 26936: Dim. "A" [mm]:
 Magnetic switch: Quantity: Type:
 Transmitter: Resolution [mm]: 5 / 10 Type:
 Electrical measuring length Mel [mm]:
 Converter: Type:
 Additional accessories:

Test Reports and Certificates

EN10204:2004-3.1: main pressure-bearing parts according to PED

Special Executions & Additional Notes

Notes:

- *1) Refer to pressure-temperature rating! Lowest pressure-temperature rating of any connecting flange or fitting will set the limitation!
 Test pressure will be specified according to WEKA specification AW 2.1.2.
 *2) With special reduction flanges. *3) Depending on size of connecting flanges.
 All indicated dimensions in mm. All dimensions are only valid on VLI in standard execution.