


VLI Type 25683, High Pressure Line 150

These data apply for an operating temperature of $\leq 20^{\circ}\text{C}$.

For higher operating temperatures, please check the max. permitted float pressure on the respective data sheet.

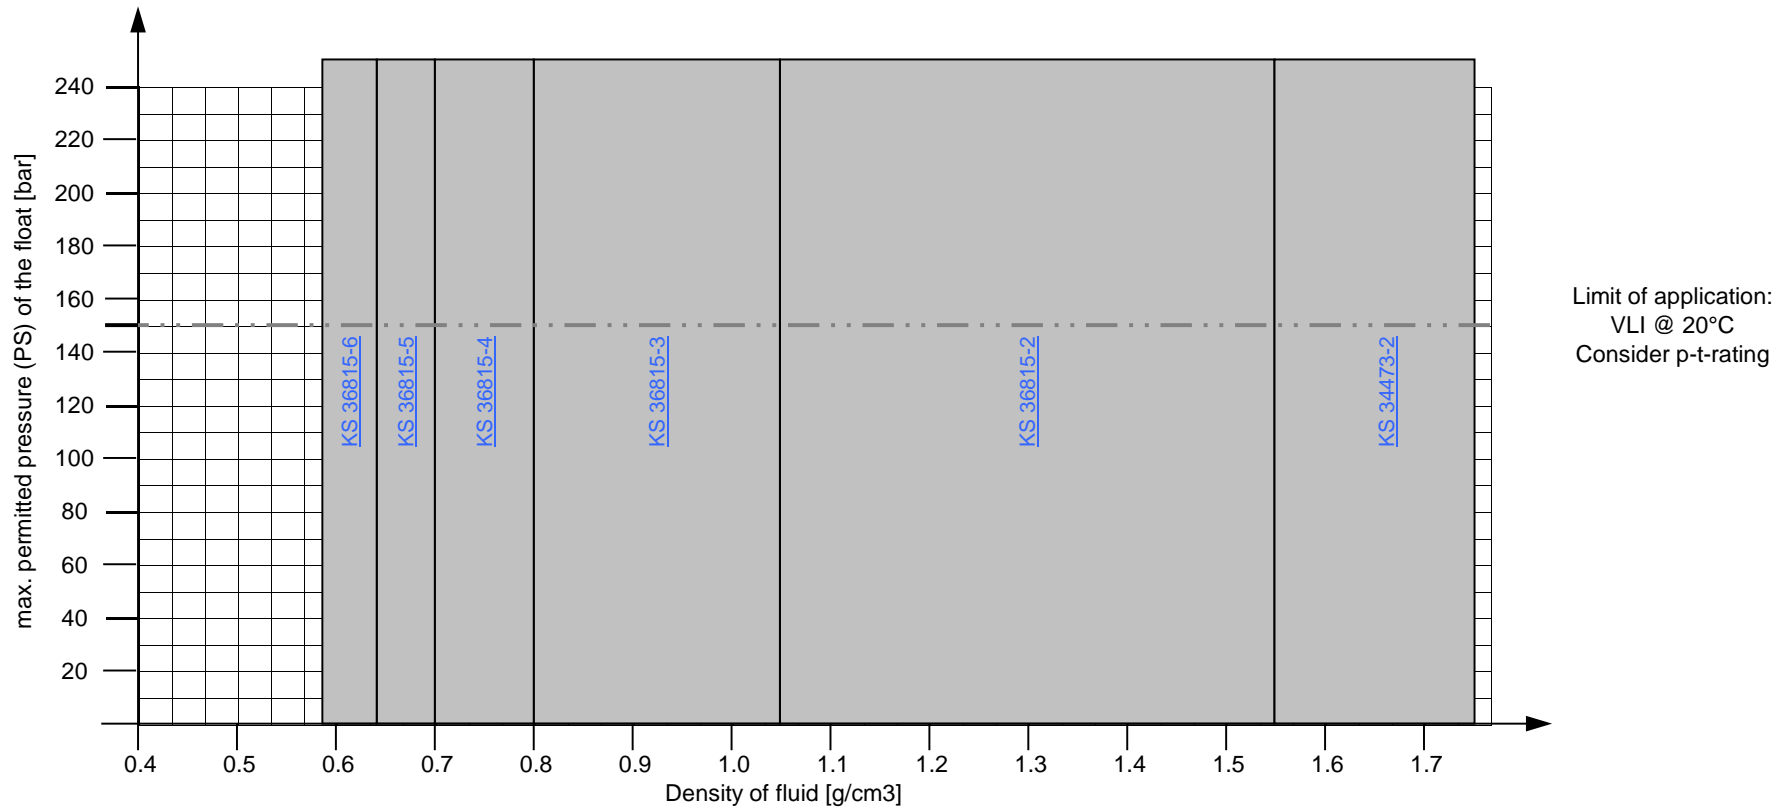

Comments:

KS = ball float

Example: 36815-X (X = number of balls)

Material = Titanium alloy

Interior diameter of the float chamber = 50mm

For steam or condensate applications, please check the use of damping springs

Additional charge for densities $< 0.55\text{g/cm}^3$ due to extended length of bottom float run-out and ball float with more than 4 balls