


## VLI Type 26411, High Pressure Line 100

These data apply for an operating temperature of  $\leq 20^\circ\text{C}$ .

For higher operating temperatures, please check the max. permitted float pressure on the respective data sheet.

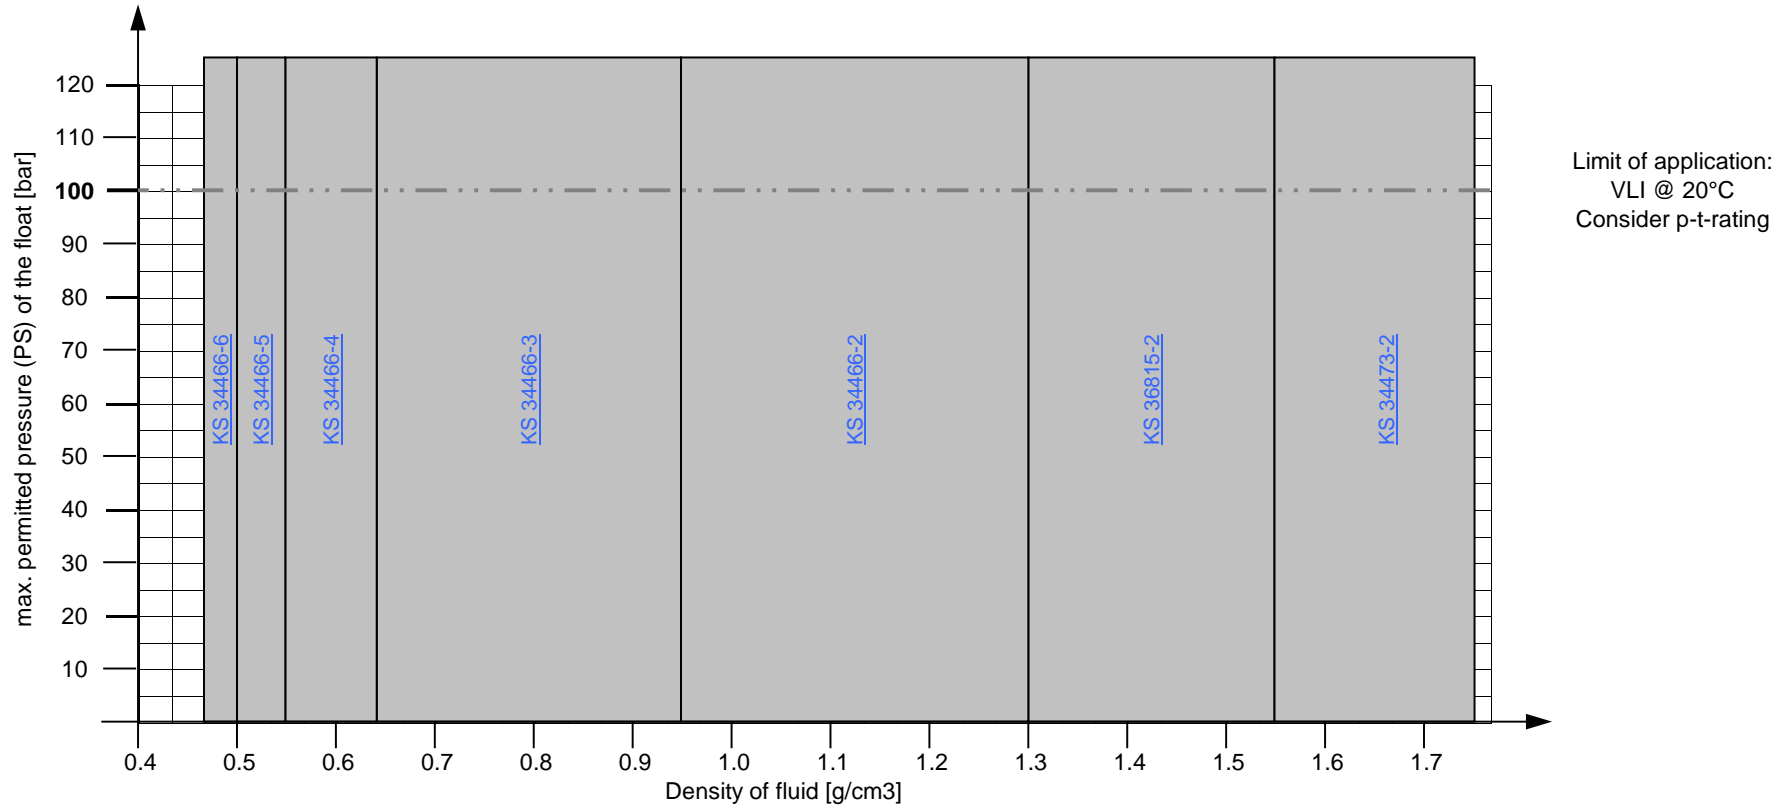

### Comments:

KS = ball float

Example: 36815-X (X = number of balls)

Material = Titanium alloy

Interior diameter of the float chamber = 51.2mm

For steam or condensate applications, please check the use of damping springs

Additional charge for densities  $< 0.55\text{g/cm}^3$  due to extended length of bottom float run-out and ball float with more than 4 balls