


## Float selection diagram VLI Type 32806, High Pressure Line 200

These data apply for an operating temperature of  $\leq 20^\circ\text{C}$ .  
For higher operating temperatures, please check the max. permitted float pressure on the respective data sheet.

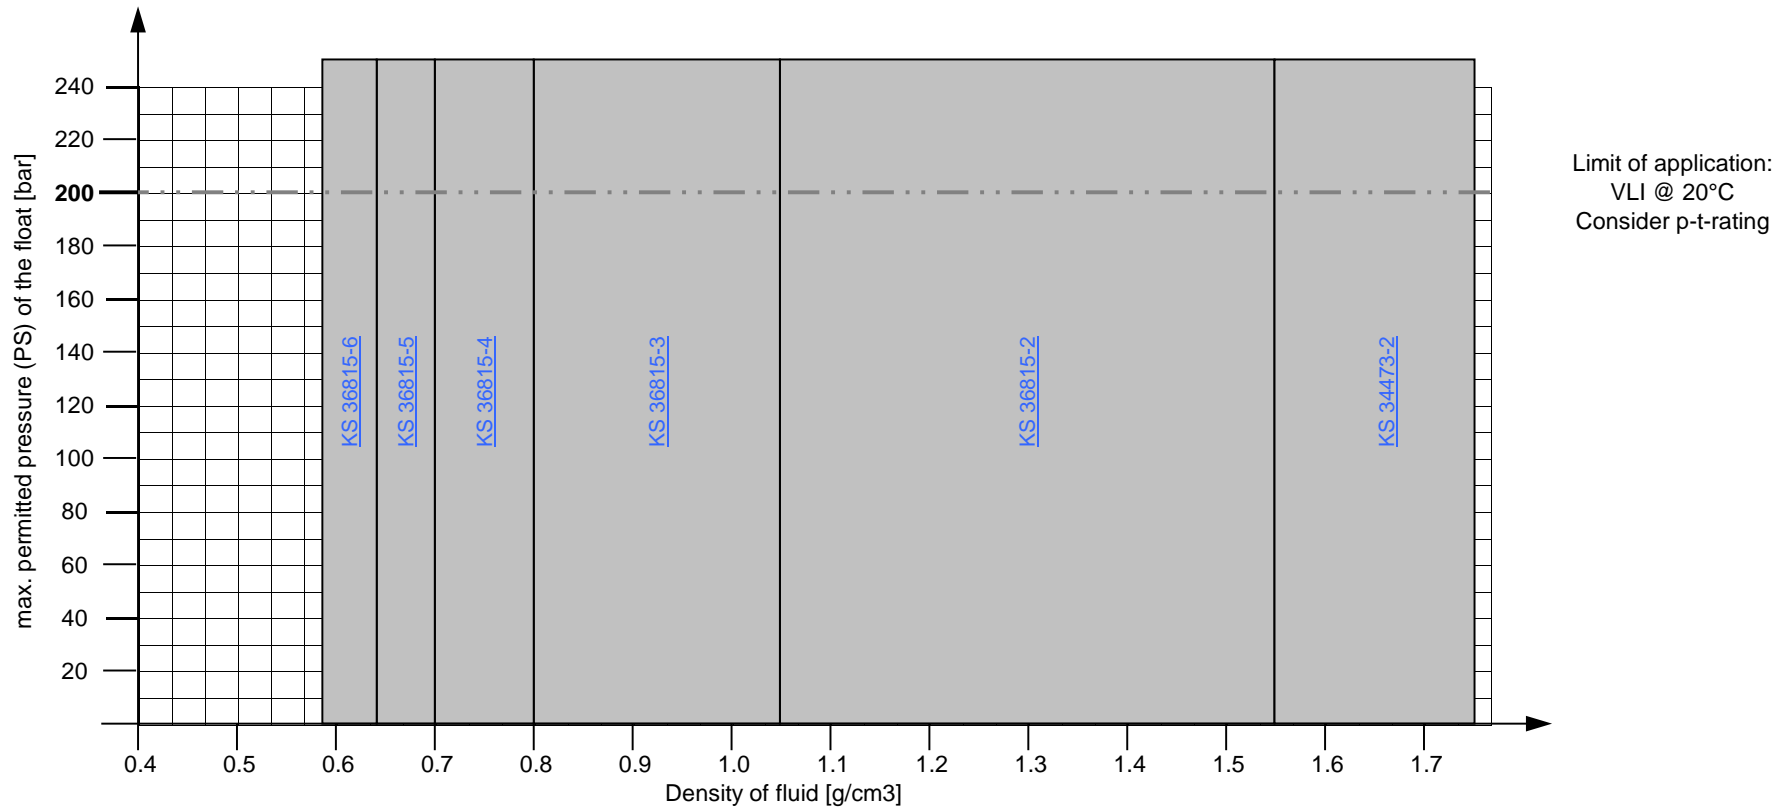

### Comments:

KS = ball float                      Example: 36815-X ( X = number of balls )                      Material = Titanium alloy  
Interior diameter of the float chamber = 50.3mm  
For steam or condensate applications, please check the use of damping springs  
Additional charge for densities < 0.7g/cm<sup>3</sup> due to extended length of bottom float run-out and ball float with more than 4 balls