



Pressure-temperature-rating for VLI High Pressure Line 200, type 32806

Max. 200bar(g) @ 20°C, up to max. 400°C for VLI bypass float chamber in SS EN 1.4401, 1.4436 & 1.4404, 1.4435 resp. ANSI 316&316L

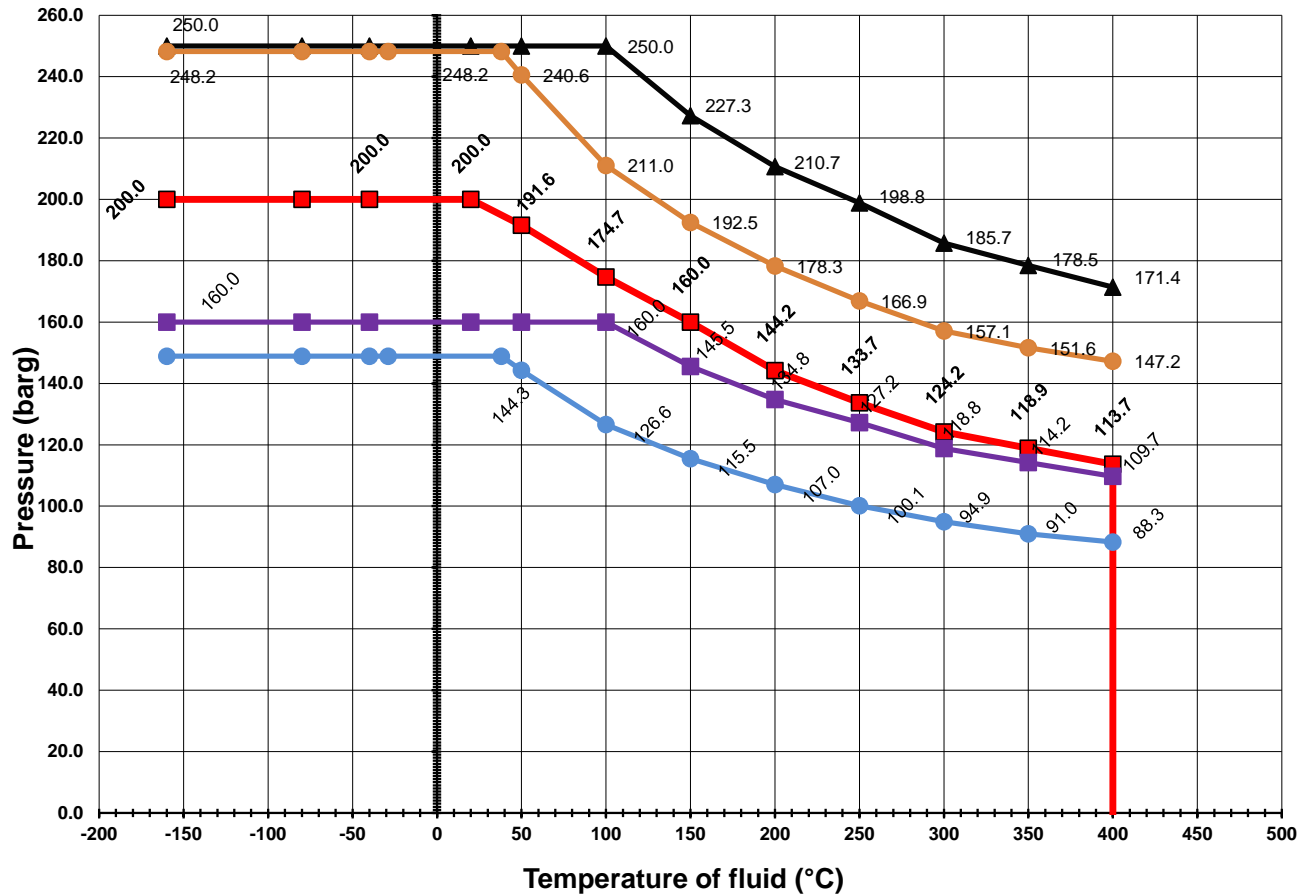

- VLI High-Pressure Line PN200 all types 32806 (-A, -B, -K, -O)
- EN 1092-1:2013 PN160 flange double certified 1.4401/1.4436 & 1.4404/1.4435 Material group 14E0
- ▲ EN 1092-1:2013 PN250 flange Double certified 1.4401/1.4436 & 1.4404/1.4435 Material group 14E0
- ASME B16.5:2013 class 900 flange double certified 316&316L Material group 2.2 resp. 2A2
- ASME B16.5:2013 class 1500 flange double certified 316&316L Material group 2.2 resp. 2A2

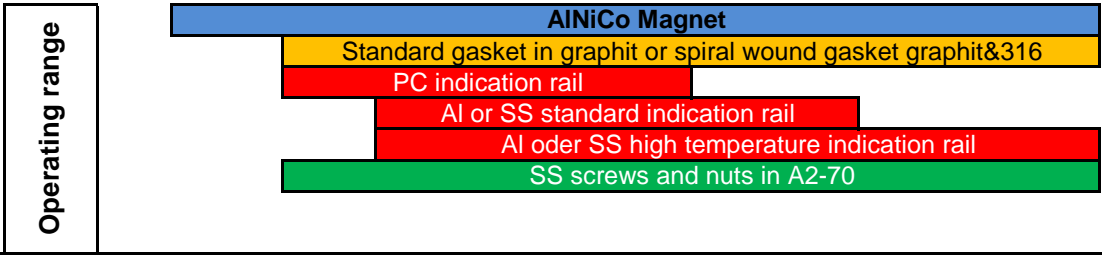

Other flanges on request

Notes:

- ANSI B16.5 flange class 900 and Class 1500 up to 2 1/2" use identical interface dimensions
- Tolerated max pressure @ specified temperature of the VLI is given either by the bypass tube or by the connection flanges
- Lower value sets the limitation! ---