


Pressure-temperature rating for Top of Tank Line SS 23013/06

Max. 6bar(g)@20°C, up to max. 500°C for ToT float chambers in SS EN 1.4401, 1.4436 & 1.4404, 1.4435 resp. ANSI 316&316L

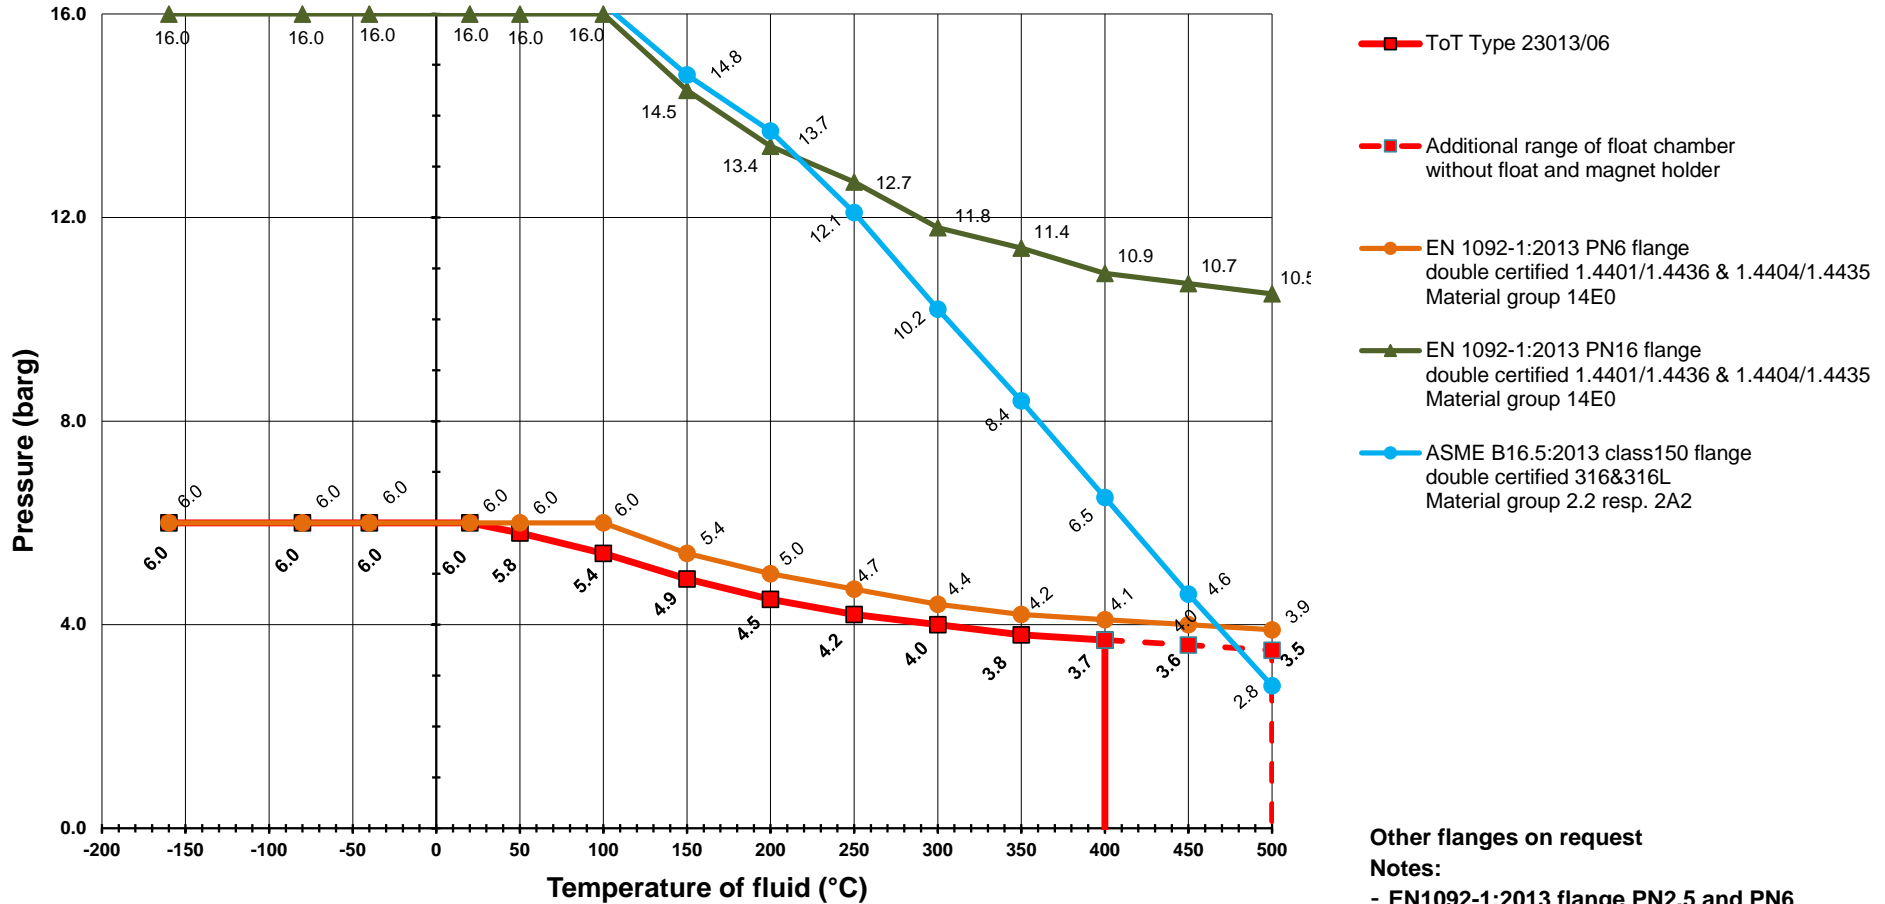

Other flanges on request

Notes:

- EN1092-1:2013 flange PN2.5 and PN8 use identical interface dimensions
- EN1092-1:2013 flange PN10 and PN16 up to DN150 use identical interface dimensions
- Tolerated max. pressure @ specified temperature for the ToT is given either by the float chamber or by the process flange
- Lower value sets the limitation! ---

