


Pressure-temperature rating for Top of Tank Line SS 25270/28

Max. 28bar(g)@20°C, up to max. 500°C for ToT float chambers in SS EN 1.4401, 1.4436 & 1.4404, 1.4435 resp. ANSI 316&316L

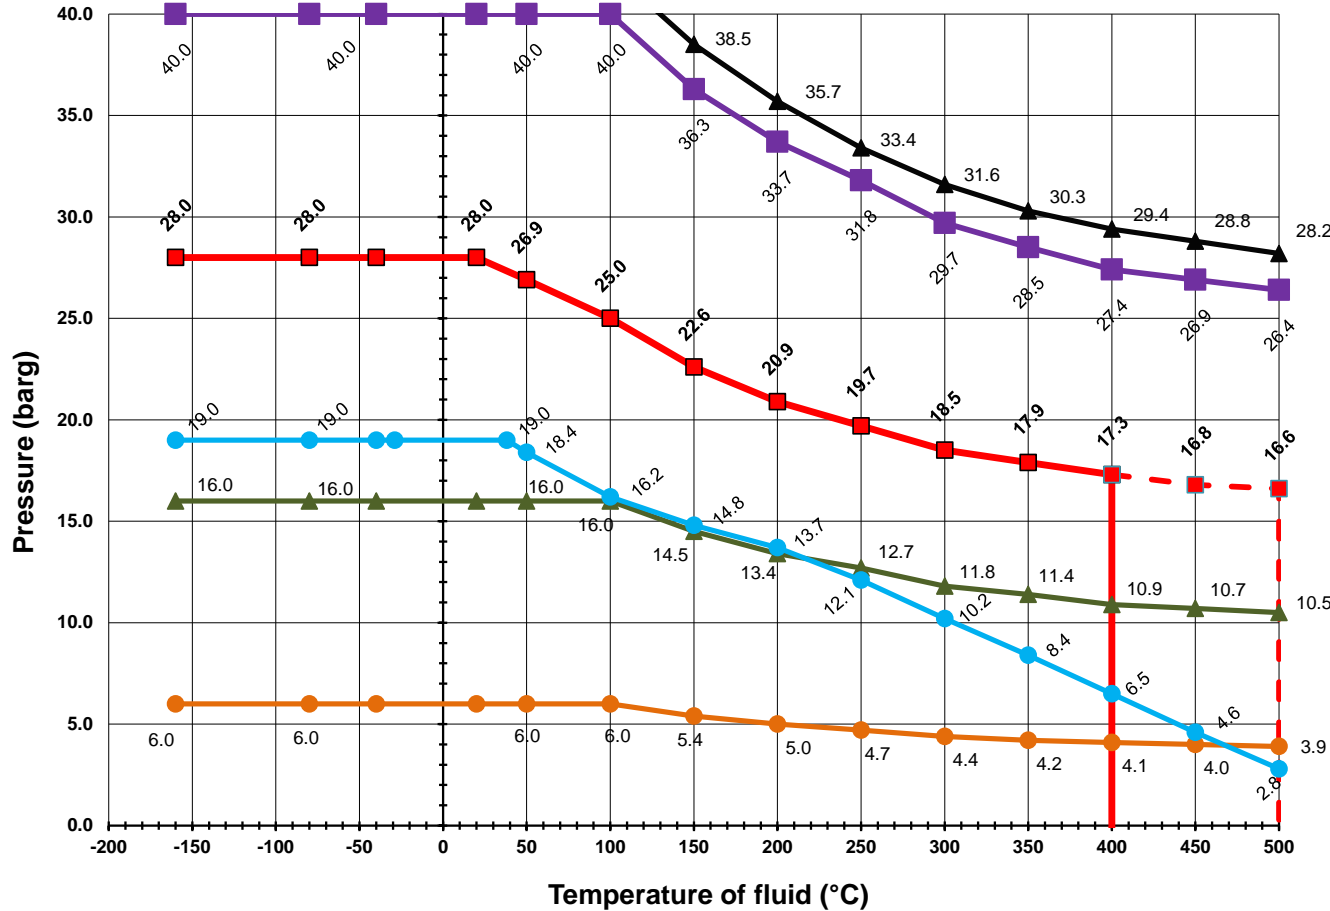

- ToT Type 25270/28
- Additional range of float chamber without float and magnet holder
- EN 1092-1:2013 PN6 flange double certified 1.4401/1.4436 & 1.4404/1.4435 Material group 14E0
- ▲ EN 1092-1:2013 PN16 flange double certified 1.4401/1.4436 & 1.4404/1.4435 Material group 14E0
- EN 1092-1:2013 PN40 flange double certified 1.4401/1.4436 & 1.4404/1.4435 Material group 14E0
- ASME B16.5:2013 class150 flange double certified 316&316L Material group 2.2 resp. 2A2
- ▲ ASME B16.5:2013 class300 flange double certified 316&316L Material group 2.2 resp. 2A2

Other flanges on request

Notes:

- EN1092-1:2013 flange PN10 and PN16 up to DN150 use identical interface dimensions
- EN1092-1:2013 flange PN25 and PN40 up to DN150 use identical interface dimensions
- Tolerated max. pressure @ specified temperature for the ToT is given either by the float chamber or by the process flange
- Lower value sets the limitation! ---

