


## Pressure-temperature rating for Top of Tank Plastic, 25272/PP

Max. 2.5bar(g)@20°C, up to max. 80°C for ToT float chambers in PP

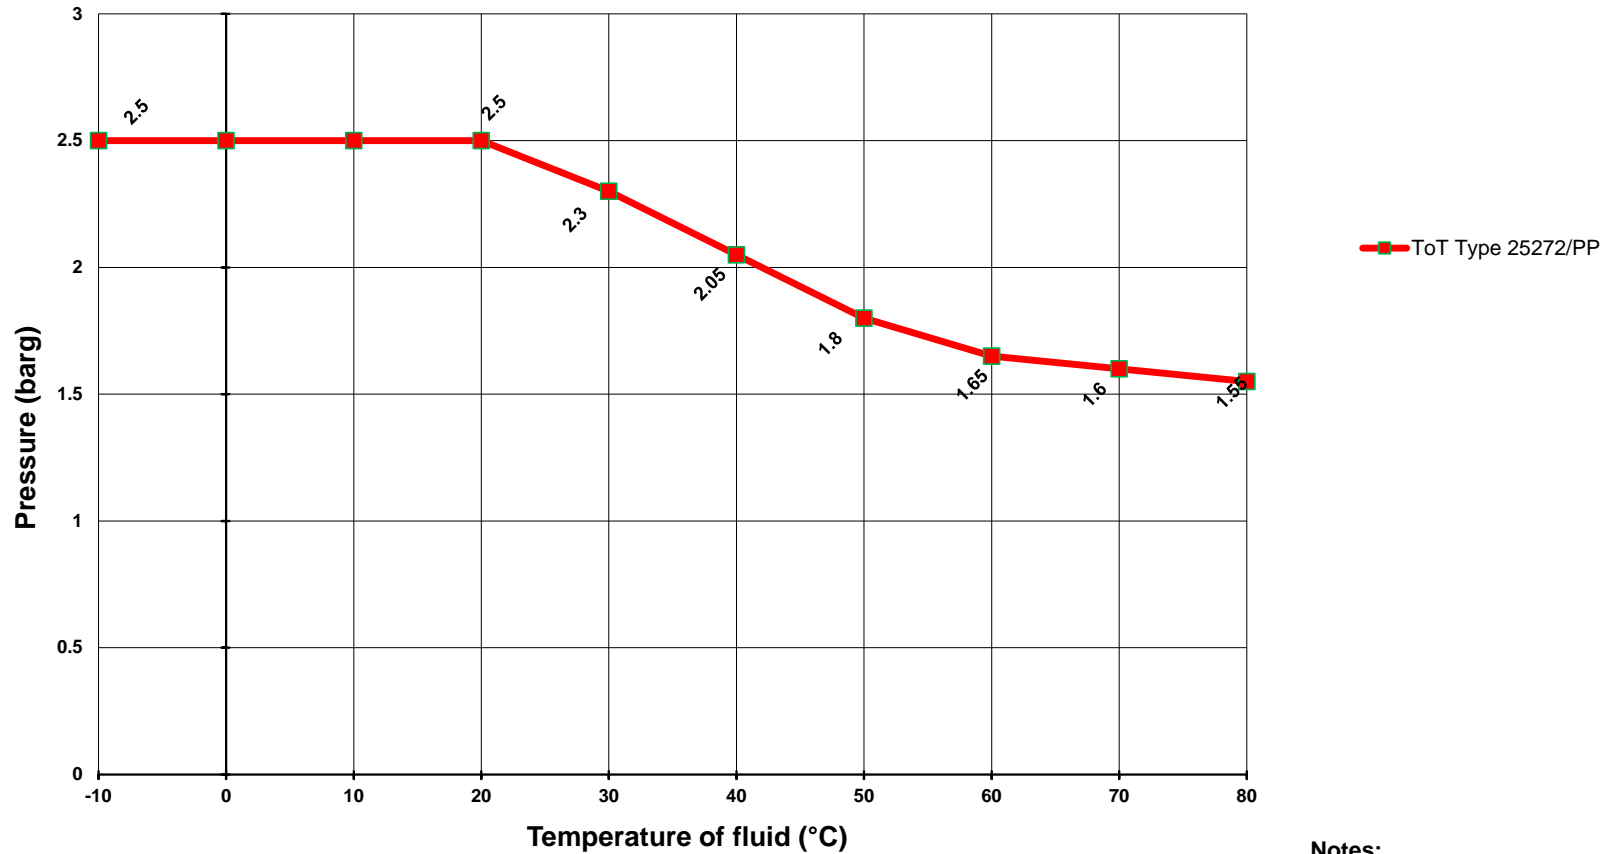

**Notes:**

The indicated values are for an estimated use of maximum 25 years. The values were determined for water or water-like media only. No reduction factor for other chemicals has been used. When using media with possible additional wear the lifetime may be reduced accordingly.

Operating range

AlNiCo Magnet
NBR gasket
PC indication rail
Al or SS standard indication rail
Al oder SS high temperature indication rail
SS screws and nuts in A2-70