


order reference
33115/05 (< 5 bar@20 °C)
33115/30 (≤ 30 bar@20 °C)

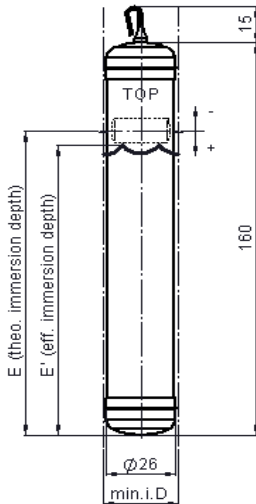

order reference²⁾
33115/40 (≤ 40 bar@20 °C)¹⁾
33115/60 (≤ 60 bar@20 °C)¹⁾

technical details

material 316L
 max. operating pressure¹⁾ 5; 30; 40; 60 bar@20 °C
 max. test pressure¹⁾ 5; 30; 40; 60 bar@20 °C
 min. density 0.80 g/cm³
 pipe min. ID 28/32 mm
 theo. immersion depth E 147.9 mm
 eff. immersion depth E' see diagram

commentary

¹⁾ corresponds max. operating/test pressure in bar

²⁾ 33115/40 und 60 = preload pressure in bar

