

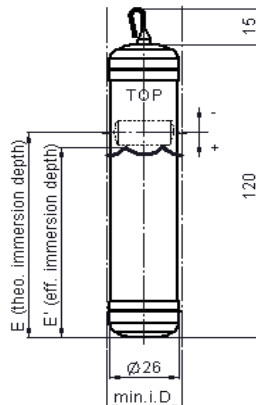


order reference
33278/05 (< 5 bar@20 °C)
33278/30 (≤ 30 bar@20 °C)

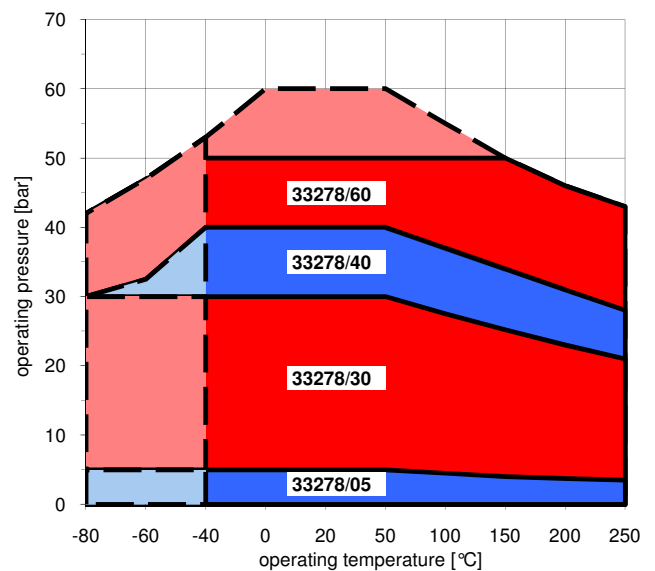

order reference²⁾
33278/40 (≤ 40 bar@20 °C)¹⁾
33278/60 (≤ 60 bar@20 °C)¹⁾

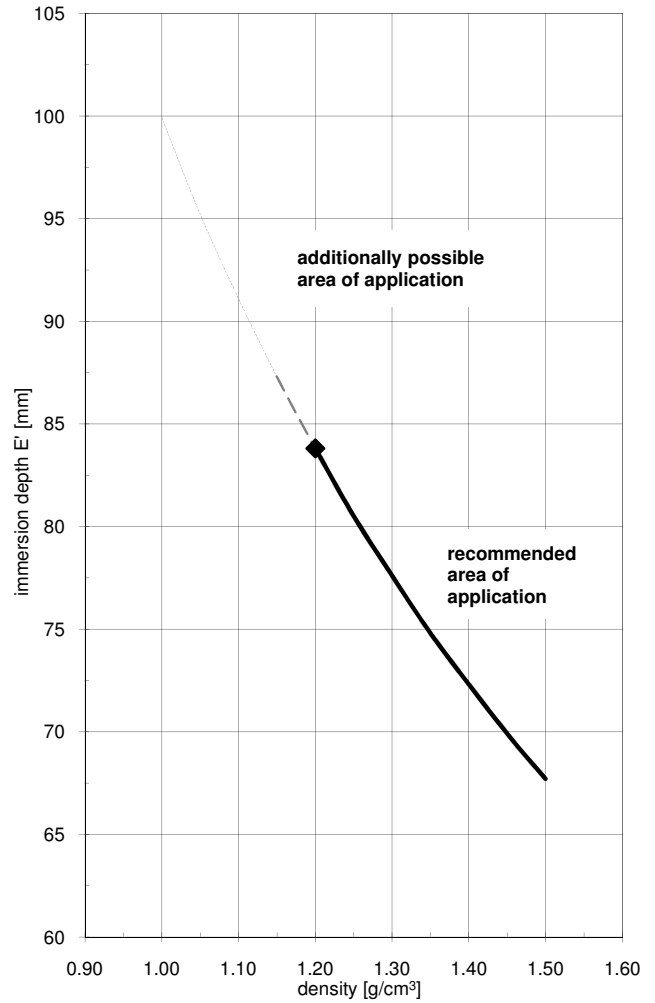

technical details

material 316L
max. operating pressure¹⁾ 5; 30; 40; 60 bar@20 °C
max. test pressure¹⁾ 5; 30; 40; 60 bar@20 °C
min. density 1.20 g/cm³
pipe min. ID 28/32 mm
theo. immersion depth E 83.8 mm
eff. immersion depth E' see diagram

commentary

¹⁾ corresponds max. operating/test pressure in bar

²⁾ 33278/40 und 60 = preload pressure in bar