

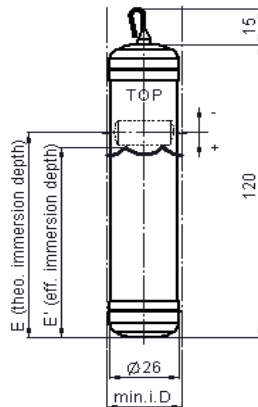


order reference
33279/05 (< 5 bar@20 °C)
33279/30 (≤ 30 bar@20 °C)

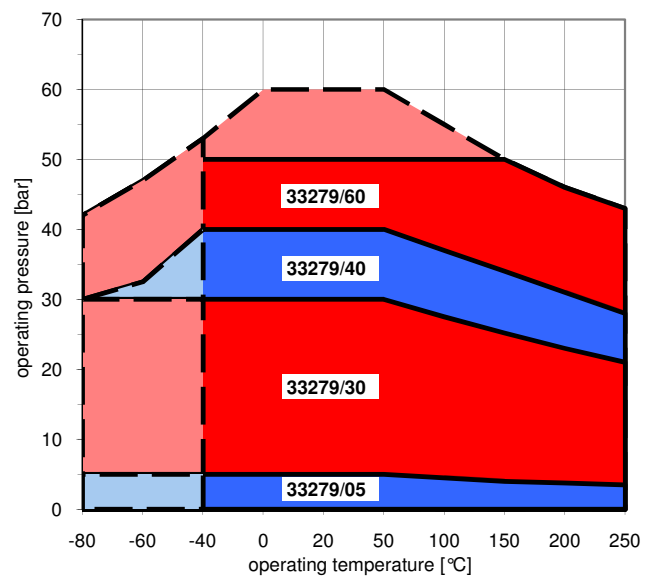

order reference²⁾
33279/40 (≤ 40 bar@20 °C)¹⁾
33279/60 (≤ 60 bar@20 °C)¹⁾

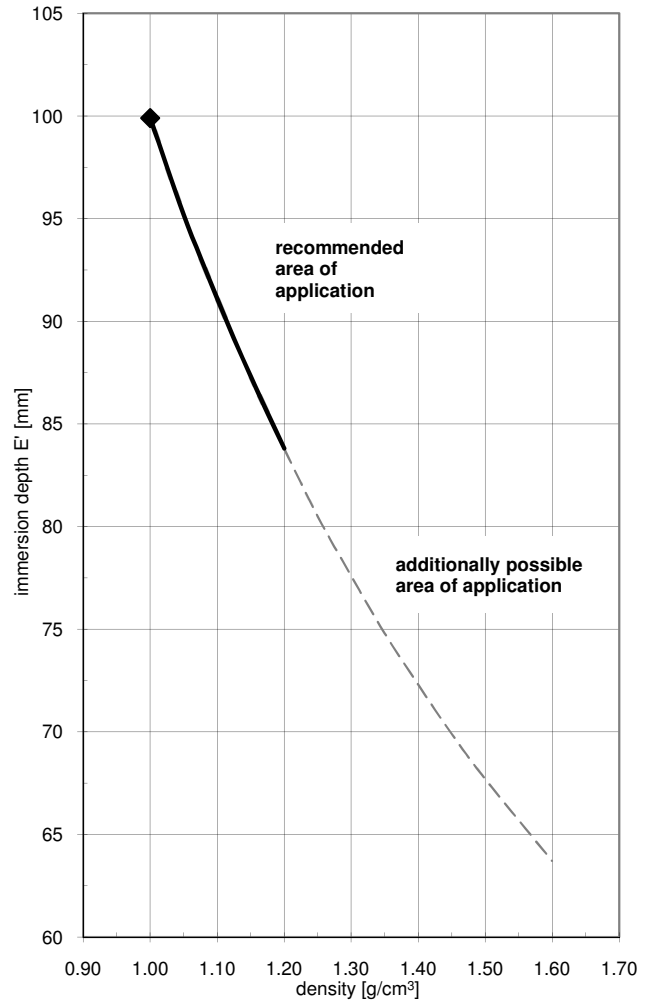

technical details

material	316L
max. operating pressure ¹⁾	5; 30; 40; 60 bar@20 °C
max. test pressure ¹⁾	5; 30; 40; 60 bar@20 °C
min. density	1.00 g/cm ³
pipe min. ID	28/32 mm
theo. immersion depth E	99.9 mm
eff. immersion depth E'	see diagram

commentary

¹⁾ corresponds max. operating/test pressure in bar

²⁾ 33279/40 und 60 = preload pressure in bar