


Smart Line: float Ø26x350

type 34333/XX

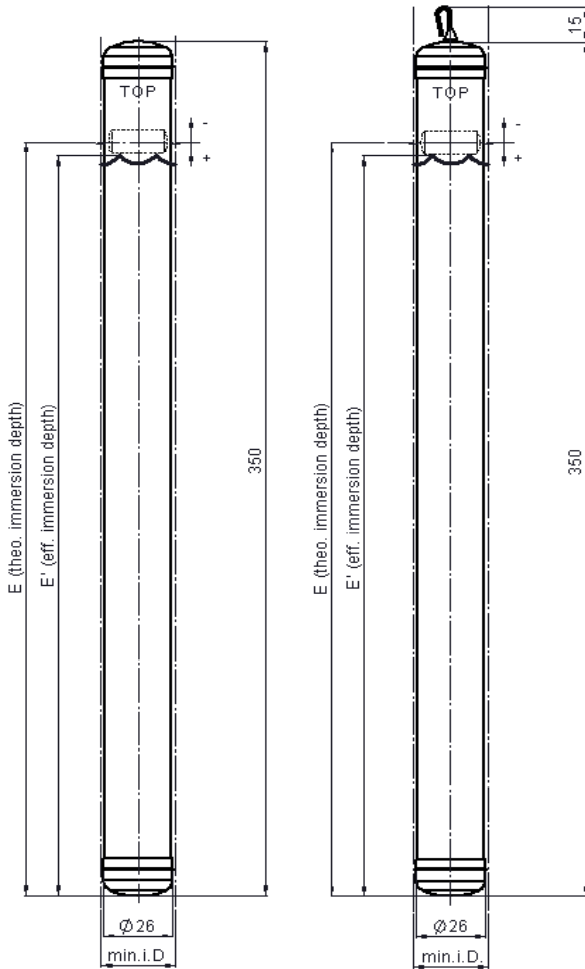

order reference

34333/05 (< 5 bar@20 °C)


order reference <sup>2)</sup>

34333/15 (≤ 15 bar@20 °C) <sup>1)</sup>

34333/30 (≤ 30 bar@20 °C) <sup>1)</sup>


34333/40 (≤ 40 bar@20 °C) <sup>1)</sup>

34333/60 (≤ 60 bar@20 °C) <sup>1)</sup>

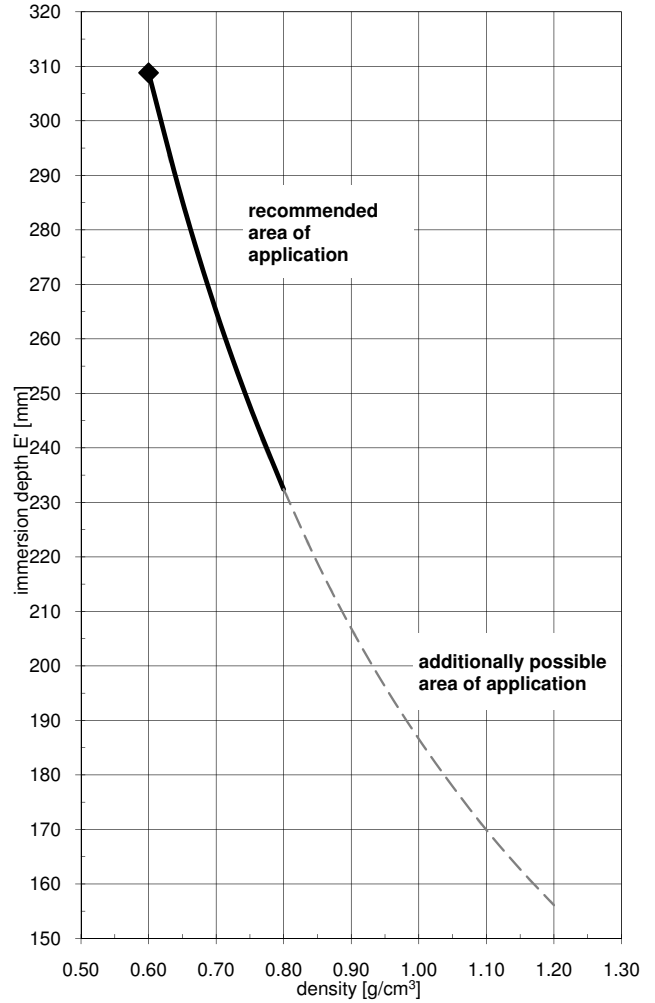

technical details

material	316L
max. operating pressure <sup>1)</sup>	5; 15; 30; 40; 60 bar@20 °C
max. test pressure <sup>1)</sup>	5; 15; 30; 40; 60 bar@20 °C
min. density	0.60 g/cm <sup>3</sup>
pipe min. ID	28/32 mm
theo. immersion depth E	308.8 mm
eff. immersion depth E'	see diagram

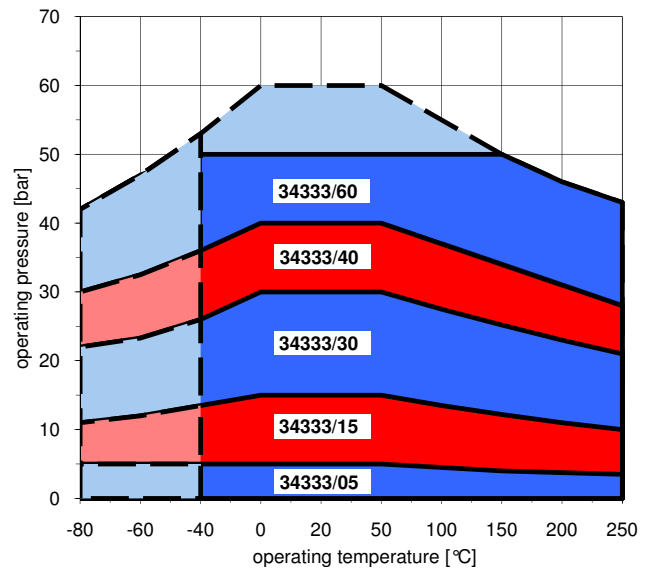

commentary

<sup>1)</sup> corresponds max. operating/test pressure in bar

<sup>2)</sup> 34333/15; 30; 40 und 60 = preload pressure in bar