

**order reference**


35615/05 (< 5 bar@20 °C)

**order reference <sup>(2)</sup>**

- 35615/15 (≤ 15 bar@20 °C) <sup>(1)</sup>
- 35615/30 (≤ 30 bar@20 °C) <sup>(1)</sup>
- 35615/40 (≤ 40 bar@20 °C) <sup>(1)</sup>
- 35615/60 (≤ 60 bar@20 °C) <sup>(1)</sup>

**technical details**

material	316L
max. operating pressure <sup>(1)</sup>	5; 15; 30; 40; 60 bar@20 °C
max. test pressure <sup>(1)</sup>	5; 15; 30; 40; 60 bar@20 °C
min. density	0.70 g/cm <sup>3</sup>
pipe min. ID	28/32 mm
theo. immersion depth E	205.0 mm
eff. immersion depth E'	see diagram

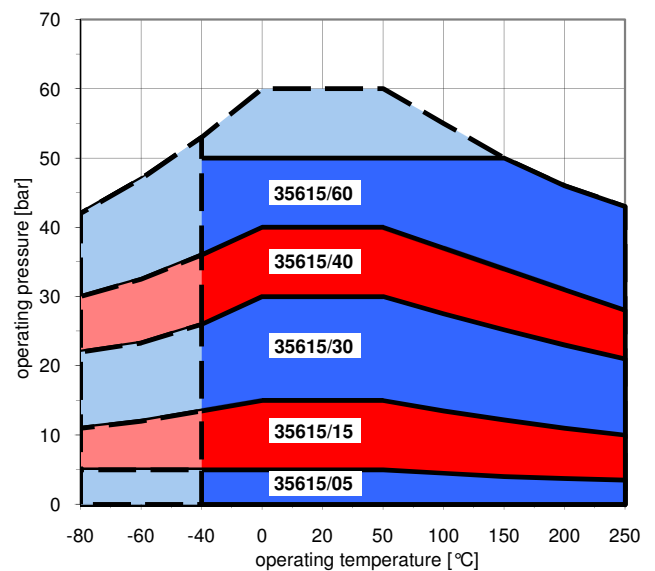

**commentary**

<sup>(1)</sup> corresponds max. operating/test pressure in bar

<sup>(2)</sup> 35615/15; 30; 40 und 60 = preload pressure in bar