


order reference
29689

technical details

material	316L	
max. operating pressure	vented	
max. test pressure	vented	
min. density	0.60 g/cm ³	
pipe min. ID	50/54 mm	
theo. immersion depth E	184.9 mm	= with density 0.60 g/cm ³
	159.4 mm	= with density 0.70 g/cm ³
	140.3 mm	= with density 0.80 g/cm ³
	125.4 mm	= with density 0.90 g/cm ³
eff. immersion depth E'	see diagram	

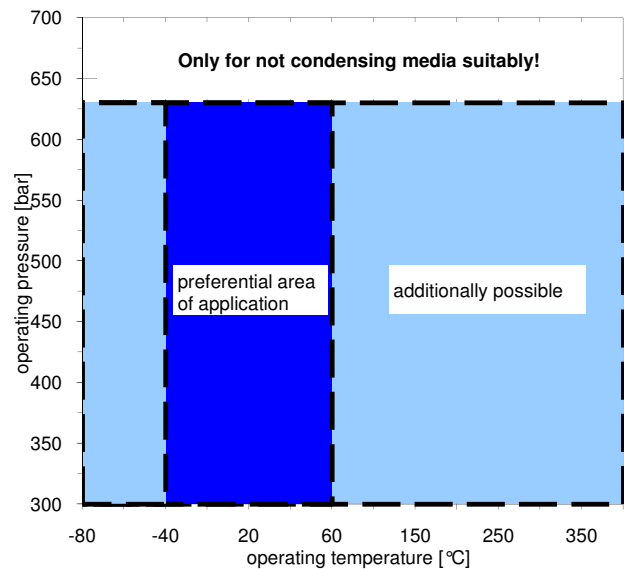

The operating- and test pressure don't have influence on the permissible area of application of the float!