


order reference  
36223/20

**technical details**

material	316L
max. operating pressure <sup>1)</sup>	20 bar@20 °C
max. test pressure <sup>1)</sup>	20 bar@20 °C
min. density	0.65 g/cm <sup>3</sup>
pipe min. ID	48/50 mm
theo. immersion depth E	181.3 mm = with density 0.65 g/cm <sup>3</sup>
	168.7 mm = with density 0.70 g/cm <sup>3</sup>
	157.9 mm = with density 0.75 g/cm <sup>3</sup>
	148.3 mm = with density 0.80 g/cm <sup>3</sup>
	140.0 mm = with density 0.85 g/cm <sup>3</sup>
	132.5 mm = with density 0.90 g/cm <sup>3</sup>
eff. immersion depth E'	see diagram

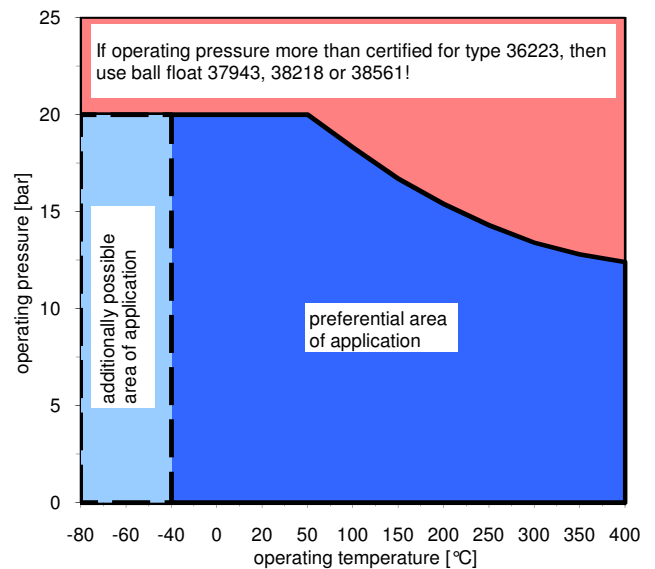

**commentary**

<sup>1)</sup> corresponds max. operating/test pressure in bar