


**order reference**  
38662/20

**technical details**

material	316L	
max. operating pressure <sup>1)</sup>	20 bar@20 °C	
max. test pressure <sup>1)</sup>	20 bar@20 °C	
min. density	0.90 g/cm <sup>3</sup>	
pipe min. ID	48/50 mm	
theo. immersion depth E	89.8 mm	= with density 0.90 g/cm <sup>3</sup>
	85.4 mm	= with density 0.95 g/cm <sup>3</sup>
	81.4 mm	= with density 1.00 g/cm <sup>3</sup>
	74.8 mm	= with density 1.10 g/cm <sup>3</sup>
	68.8 mm	= with density 1.20 g/cm <sup>3</sup>
	63.9 mm	= with density 1.30 g/cm <sup>3</sup>
	59.7 mm	= with density 1.40 g/cm <sup>3</sup>
	56.1 mm	= with density 1.50 g/cm <sup>3</sup>
eff. immersion depth E'	see diagram	

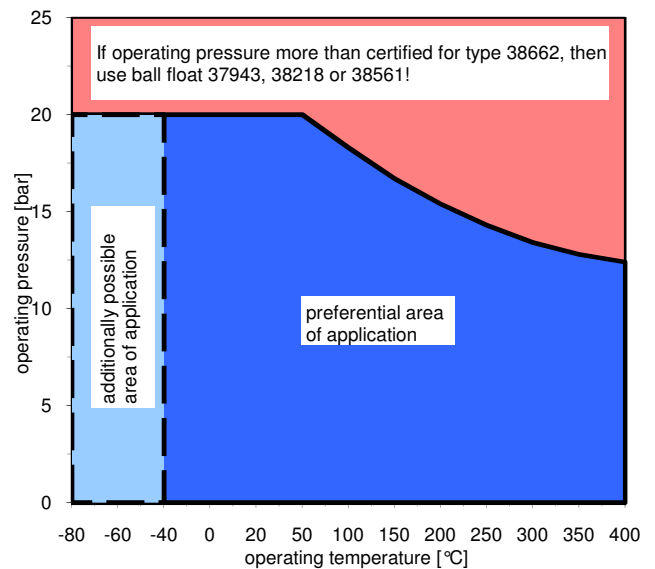

**commentary**

<sup>1)</sup> corresponds max. operating/test pressure in bar