


order reference
25262

technical details

material	PVC-U
max. operating pressure *1)	5bar@20 °C
max. test pressure *1)	5bar@20 °C
min. density	0.70 g/cm ³
pipe min. ID	53/58 mm
theo. immersion depth	148.8 mm = with density 0.70 g/cm ³
	133.3 mm = with density 0.80 g/cm ³
	121.3 mm = with density 0.90 g/cm ³
	111.7 mm = with density 1.00 g/cm ³
	103.8 mm = with density 1.10 g/cm ³
	97.2 mm = with density 1.20 g/cm ³
	91.7 mm = with density 1.30 g/cm ³
	86.9 mm = with density 1.40 g/cm ³
	82.8 mm = with density 1.50 g/cm ³
eff. immersion depth E'	see diagram

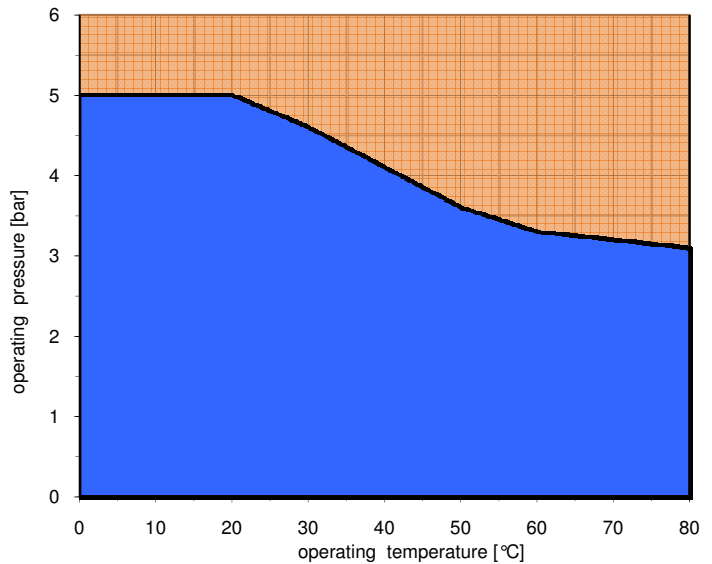

commentary

*1) corresponds max. operating/test pressure in bar