


order reference
26620

technical details

material	PP-H	
max. operating pressure *1)	5bar@20 °C	
max. test pressure *1)	5bar@20 °C	
min. density	0.80 g/cm ³	
pipe min. ID	53/58 mm	
theo. immersion depth	123.6 mm = with density	0.60 g/cm ³
	106.1 mm = with density	0.70 g/cm ³
	93.0 mm = with density	0.80 g/cm ³
	82.8 mm = with density	0.90 g/cm ³
	74.7 mm = with density	1.00 g/cm ³
	68.0 mm = with density	1.10 g/cm ³
	62.4 mm = with density	1.20 g/cm ³

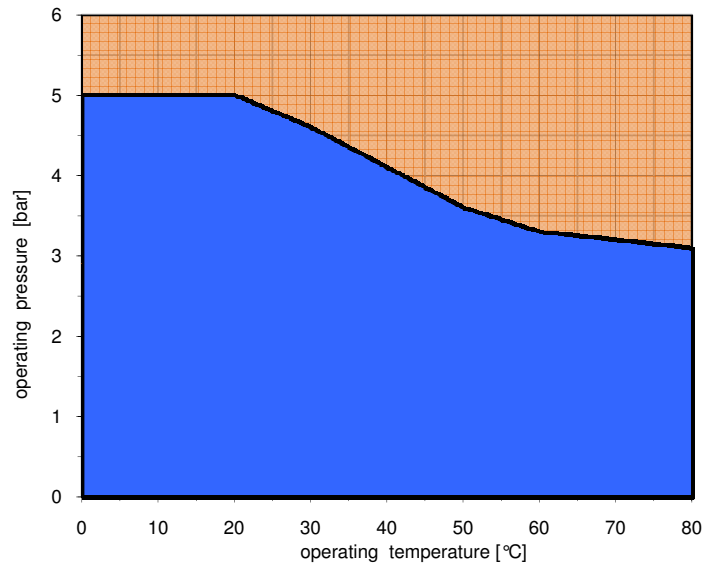

eff. immersion depth E' see diagram

commentary

*1) corresponds max. operating/test pressure in bar