


order reference  
28831

**technical details**

material	PVDF	
max. operating pressure *1)	16bar@20 °C	
max. test pressure *1)	16bar@20 °C	
min. density	0.80 g/cm <sup>3</sup>	
pipe min. ID	53/58 mm	
theo. immersion depth	140.6 mm = with density	0.80 g/cm <sup>3</sup>
	125.1 mm = with density	0.90 g/cm <sup>3</sup>
	112.8 mm = with density	1.00 g/cm <sup>3</sup>
	102.6 mm = with density	1.10 g/cm <sup>3</sup>
	94.2 mm = with density	1.20 g/cm <sup>3</sup>
	87.0 mm = with density	1.30 g/cm <sup>3</sup>
	80.9 mm = with density	1.40 g/cm <sup>3</sup>
	75.6 mm = with density	1.50 g/cm <sup>3</sup>
	70.9 mm = with density	1.60 g/cm <sup>3</sup>
	66.8 mm = with density	1.70 g/cm <sup>3</sup>
	63.2 mm = with density	1.80 g/cm <sup>3</sup>

eff. immersion depth E' see diagram

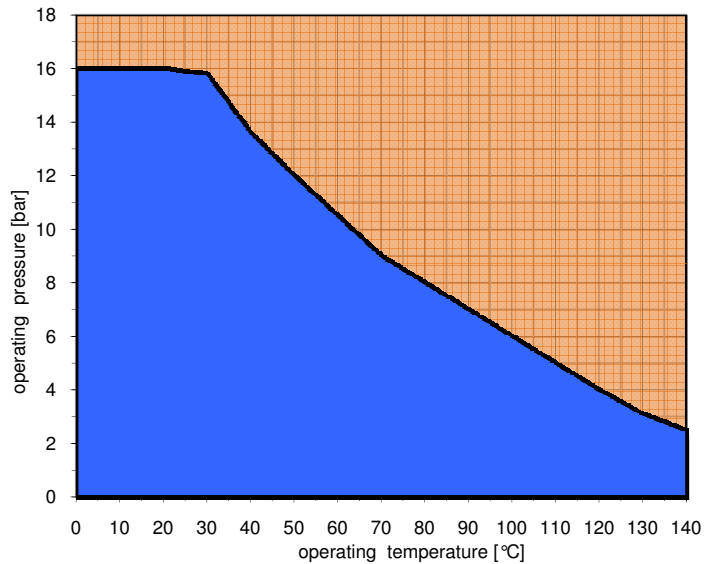

**commentary**

\*1) corresponds max. operating/test pressure in bar