


order reference
34748

technical details

material	PP-H	
max. operating pressure *1)	5bar@20 °C	
max. test pressure *1)	5bar@20 °C	
min. density	0.80 g/cm ³	
pipe min. ID	53/58 mm	
theo. immersion depth	77.0 mm = with density	0.80 g/cm ³
	68.5 mm = with density	0.90 g/cm ³
	61.8 mm = with density	1.00 g/cm ³
	56.3 mm = with density	1.10 g/cm ³
	51.7 mm = with density	1.20 g/cm ³
	47.8 mm = with density	1.30 g/cm ³
	44.5 mm = with density	1.40 g/cm ³
	41.6 mm = with density	1.50 g/cm ³
	39.1 mm = with density	1.60 g/cm ³
	36.9 mm = with density	1.70 g/cm ³
	34.9 mm = with density	1.80 g/cm ³

eff. immersion depth E' see diagram

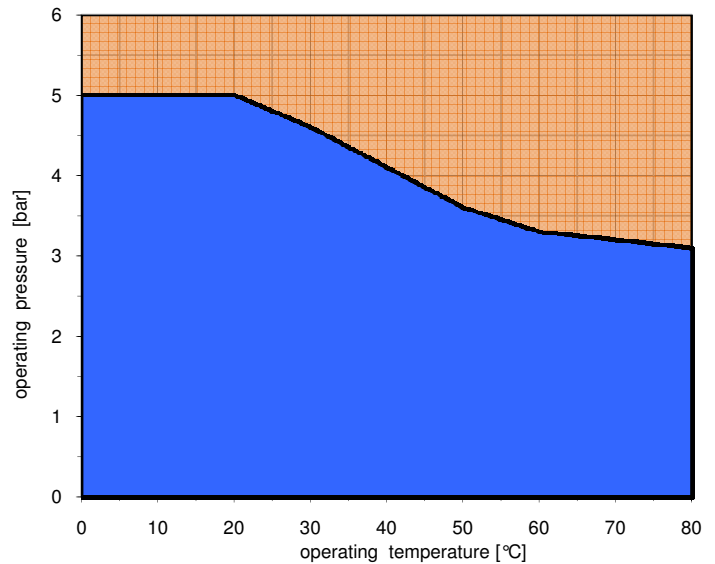

commentary

*1) corresponds max. operating/test pressure in bar