


order reference
34749

technical details

material	PVDF		
max. operating pressure *1)	16bar@20 °C		
max. test pressure *1)	16bar@20 °C		
min. density	1.30 g/cm ³		
pipe min. ID	53/58 mm		
theo. immersion depth	66.2 mm = with density	1.30	g/cm ³
	62.0 mm = with density	1.40	g/cm ³
	58.0 mm = with density	1.50	g/cm ³
	54.4 mm = with density	1.60	g/cm ³
	51.2 mm = with density	1.70	g/cm ³
	48.5 mm = with density	1.80	g/cm ³

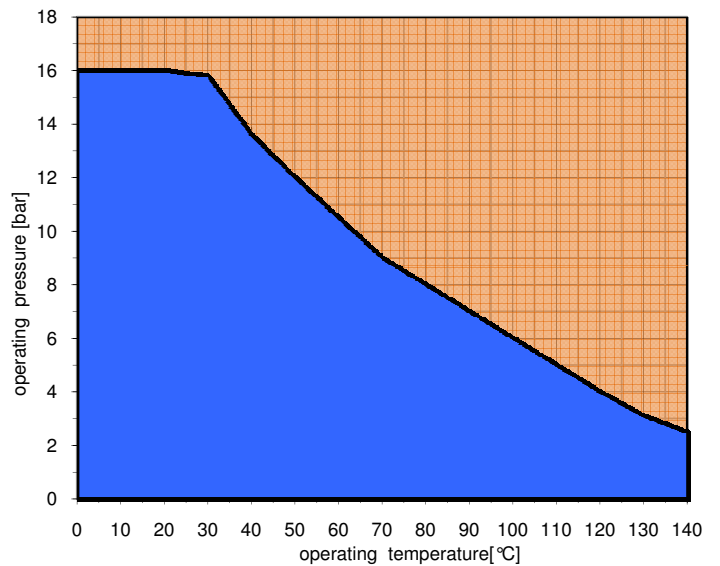

eff. immersion depth E' see diagram

commentary

*1) corresponds max. operating/test pressure in bar