


order reference
34750

technical details

material	PVC-U		
max. operating pressure *1)	5bar@20 °C		
max. test pressure *1)	5bar@20 °C		
min. density	1.10 g/cm ³		
pipe min. ID	53/58 mm		
theo. immersion depth	88.4 mm = with density	1.10	g/cm ³
	83.1 mm = with density	1.20	g/cm ³
	78.6 mm = with density	1.30	g/cm ³
	74.8 mm = with density	1.40	g/cm ³
	71.5 mm = with density	1.50	g/cm ³

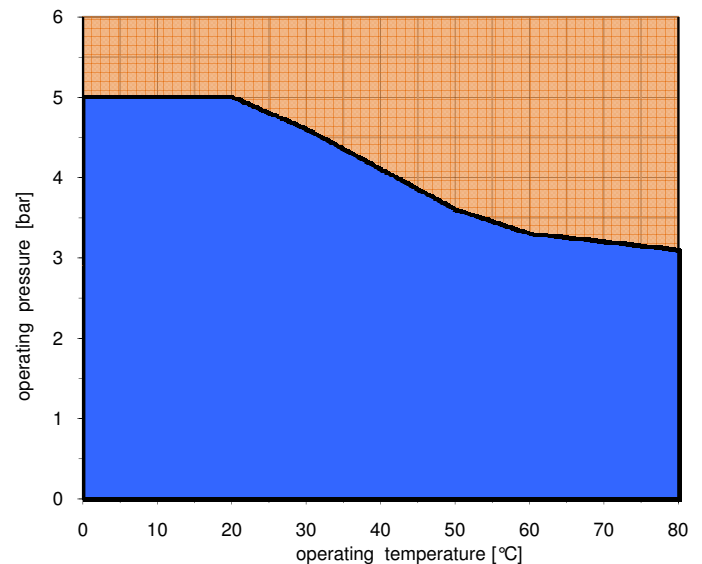

eff. immersion depth E' see diagram

commentary

*1) corresponds max. operating/test pressure in bar