


order reference
41170

technical details

material	PVDF		
max. operating pressure *1)	20bar@20 °C		
max. test pressure *1)	20bar@20 °C		
min. density	0.90 g/cm ³		
pipe min. ID	35/40mm		
theo. immersion depth E	114.4mm	= with density	0.90 g/cm ³
	103.0mm	= with density	1.00 g/cm ³
	93.8mm	= with density	1.10 g/cm ³
	86.0mm	= with density	1.20 g/cm ³
	79.5mm	= with density	1.30 g/cm ³
	74.0mm	= with density	1.40 g/cm ⁴
	69.0mm	= with density	1.50 g/cm ⁵

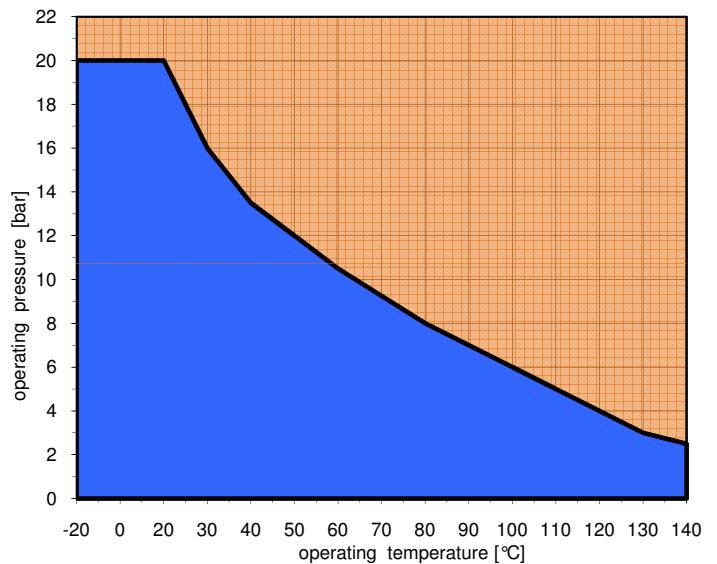

eff. immersion depth E' see diagram

commentary

*1) corresponds max. operating/test pressure in bar