


order reference
41392

technical details

material	PVC-C
max. operating pressure ¹⁾	10bar@20 °C
max. test pressure ¹⁾	10bar@20 °C
min. density	0.90 g/cm ³
pipe min. ID	35/40mm
theo. immersion depth E	84.6 mm = with density 0.90 g/cm ³
	76.2 mm = with density 1.00 g/cm ³
	69.3 mm = with density 1.10 g/cm ³
	63.3 mm = with density 1.20 g/cm ³
	58.8 mm = with density 1.30 g/cm ³
	54.6 mm = with density 1.40 g/cm ⁴
	51.1 mm = with density 1.50 g/cm ⁵

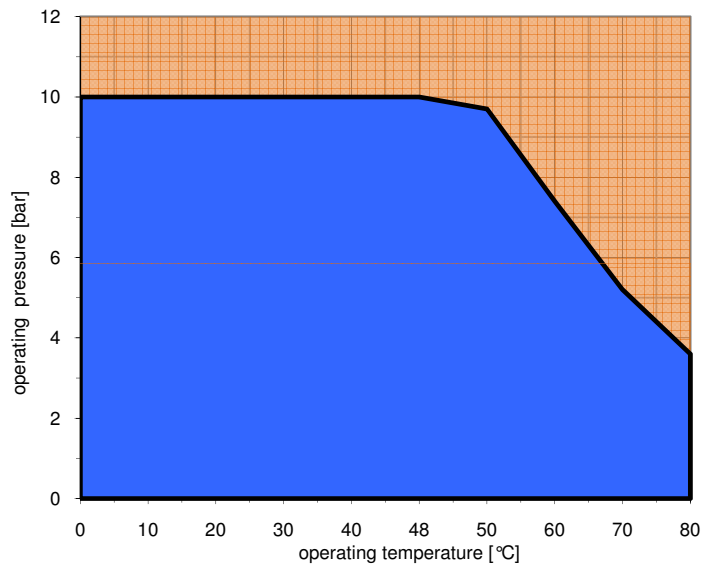

eff. immersion depth E' see diagram

commentary

¹⁾ corresponds max. operating/test pressure in bar